



### Split 316 Stainless Steel

- Inground uplighter round
- Stainless Steel 316 Marine Grade cover
- Full stainless steel body
- Anti glare honeycomb louvre
- Beam angle: 60°
- Flush tempered glass
- Trafficable to 1000kg
- Face diameter: 150mm
- Installation depth: 115mm
- **NOTE: adequate drainage must be allowed**
- IK Rating: IK10
- IP Rating: IP67

### Split 316 Stainless Steel

- Inground uplighter round
- Stainless Steel 316 Marine Grade cover
- Full stainless steel body
- Anti glare honeycomb louvre
- Beam angle: 60°
- Flush tempered glass
- Trafficable to 1000kg
- Face diameter: 210mm
- Installation depth: 110mm
- **NOTE: adequate drainage must be allowed**
- IK Rating: IK10
- IP Rating: IP67

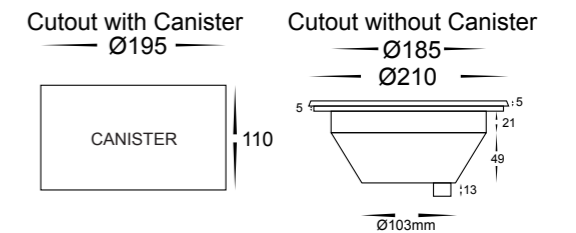
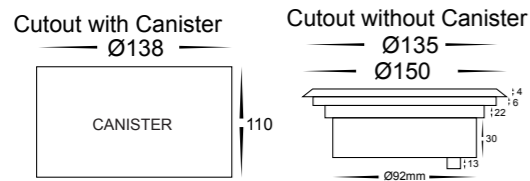


IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	<b>HV1842C</b>	5500K	450lm	12v DC	Built-in 5w
	<b>HV1842W</b>	3000k	400lm		
OPTIONAL ACCESSORIES					
	<b>HV1842-FSH</b>	Security Face with screw holes to suit HV1842 range			

IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	<b>HV1843C</b>	5500K	1200lm	12v DC	Built-in 12w
	<b>HV1843W</b>	3000k	960lm		
OPTIONAL ACCESSORIES					
	<b>HV1843-FSH</b>	Security Face with screw holes to suit HV1843 range			

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274  
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274  
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336