

Uton

- DIY mini deck light
- Polycarbonate construction
- 2x 1.5 metre cable length per light
- RGB multi-function (HV2827RGB Only)
- IP Rating: light fittings IP67 / driver IP66
- Suitable for in-ground installation
- Kit includes:
 - 6 x single deck light (0.5w per light)
 - 1x LED driver
 - 1x 4m extension cable
 - 1x RF RGB remote controller (HV2827RGB Only)




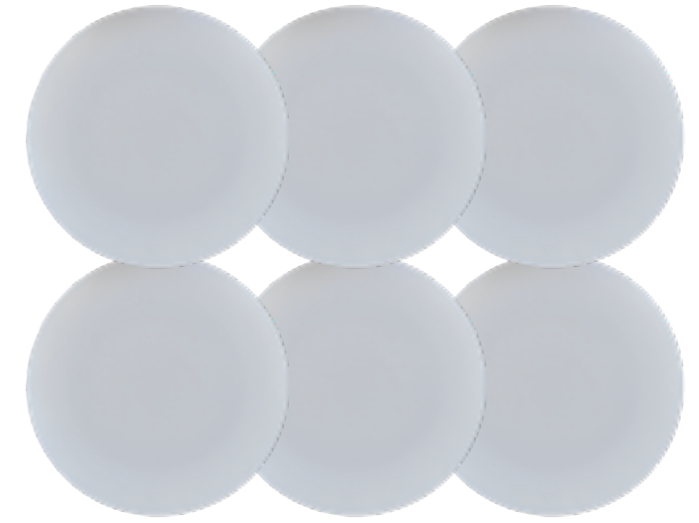


IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV2827C (6 light kit)	5500K	6x 50lm	Driver: 240v LED Fittings: 12v DC	Built-in 6 x 0.5w with Driver
	HV2827W (6 light kit)	3000k	6x 40lm		
	HV2827RGB (6 light kit)	Multi Colour			
IMAGE	PART NUMBER	COLOUR TEMP	LUMENS	INPUT	INCLUDED LED
	HV28271C	5500K	50lm	12v DC	Built-in 0.5w
	HV28271W	3000k	40lm		
	HV28271RGB	Multi Colour			
	HV2826-D-12W	NA	NA	240v	NA
OPTIONAL ACCESSORIES					
	HV2826-2M-EXT	Optional 2 metre extension cable to extend length between fittings. Sold separately			
	HV2826RGB-2M-EXT				
	HV2826-4M-EXT	Optional 4 metre extension cable to extend length between fittings. Sold separately			
	HV2826RGB-4M-EXT				

Max 4 additional fittings (HV28271) can be added to the kit (HV2827). Total 10 fittings with supplied driver.
Larger kits can be configured using alternate Havit LED drivers.

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336

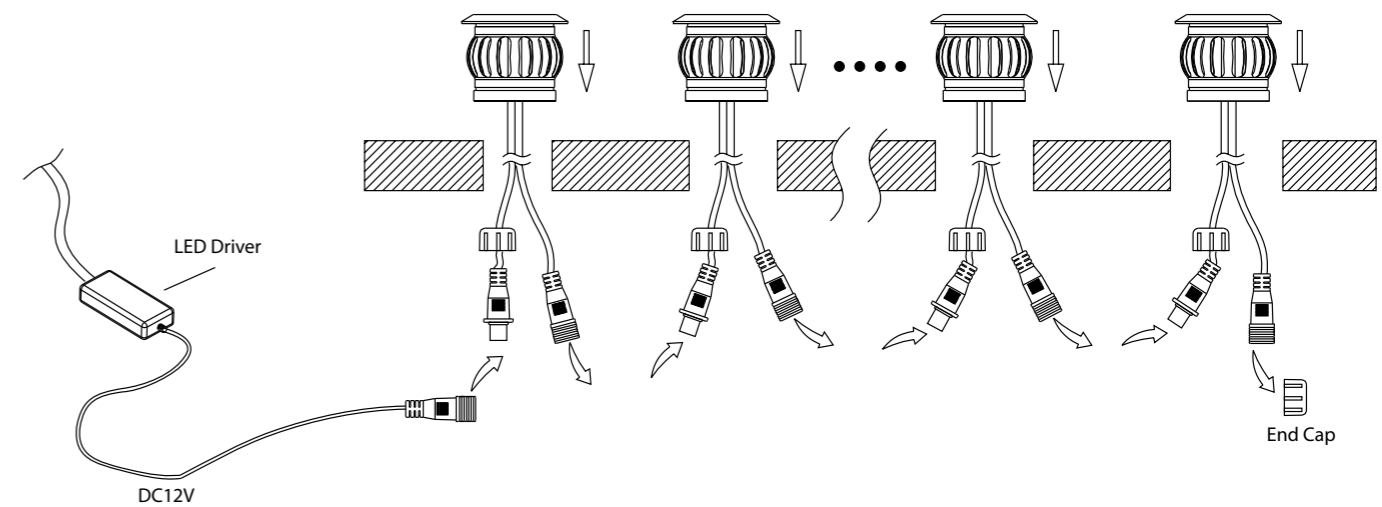

All low voltage products that specify an input of 12v or 24v DC must be used with a suitable LED driver, refer to pages 267 - 274
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to page 336