
Border Lite Twin

Cat. No. BLT Cat. No. BLT/R Cat. No. BLTG9





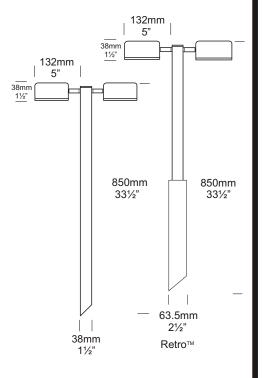

The Border Lite Twin has two individual heads which can be aimed in different directions, making it ideal for path lighting giving a wide spread of light with no upward projection. Each head has a fully adjustable arm allowing 360 degree rotation and 0 - 90 degree elevation.

The Retro[™], which is a mains option, avoids the need to bury a transformer. The 110/240-12 volt electronic transformer is built into the pole and is a double insulated safety isolating transformer, this changes the luminaire to an IP56 rating.

This luminaire is equipped with Hunza's Anti-Syphon™ (not Retro luminaires) system which has been designed to counter the problem of wicking (siphoning) of water through the supply cable into the lamp housing, causing water to condense and dramatically shorten the life of the lamp, lamp holder and luminaire.

A G9 version of this luminaire is also available for line voltage lamps.

Ordering Information

Luminaire Type Material/Finish Accessories BLT - Border Lite Twin CJK150 - Cable Joint Kit BK - Black BZ - Bronze LENSBLC - Clear Lens /R - Retro™ Transformer GN - Green STAR - Silver Star 110/240-12 volt WH - White G9 - G9 option WB - Birch DG - Dark Grey For **LED** options, refer to page OG - Olive Green 10.4.1 (G4 JC LED), RG - Beige 10.4.6 (Wafer LED) or PR - Primrose http://hunza.co.nz/l.html SBZ - Solid Bronze SS - 316 Stainless Steel

Ordering Example: BLT SS - Border Lite Twin in 316 Stainless Steel

BLT/R BK - Border Lite Twin Retro™ Black BLTG9 BK - Border Lite Twin G9 in Black

(Accessories ordered separately)



HUNZA FACTORY 130 Felton Mathew Ave Glen Innes Auckland 1072 New Zealand

Ph: 64-9-528 9471 Fax: 64-9-528 9361 hunza@hunza.co.nz www.hunza.co.nz INTERNATIONAL CONTACTS: www.hunza.co.nz/contacts.php

Specifications may change without notice. Manufactured in New Zealand. © 2011 Hunza Holdings Ltd.

Ver 1.4

Luminaire Construction

Aluminium

Head:

Cast from virgin high corrosion resistant CC401 low copper aluminium alloy, with chromate substrate and high UV resistant polyester powder coat

Colours Black, Bronze, Green, Silver Star, White, Birch, Dark Green, Olive Green, Beige, Primrose.

Poles: Aluminium, 38mm (1½") x 850mm (33½") tube.

Retro™ Pole: 38mm (1½") x 410mm (16") tube.

Transformer Pole: 63.5mm ($2\frac{1}{2}$ ") x 440mm ($17\frac{1}{2}$ ").

Solid Bronze

Head: Investment Cast from

LG2 Bronze.

Poles: Copper, 38mm (1½") x 850mm (33½") tube.

316 Stainless Steel

Head: Investment cast 316 Stainless Steel.

Poles: 316 Stainless Steel, 38mm (1½") x 850mm (33½") tube.

Mounting

Pole 850mm (33½") directly mounted into the earth.

Features

Cable:

Water resistant rubber with HUNZA Anti-Syphon™ water barrier system.

Lens:

3mm Frosted tempered shatter resistant glass with a Lifetime Warranty.

Lamp Holder:

G4 - 350°c (662°f) ceramic multi contact lamp holder with 250°c (480°f) teflon cables.

G9 - 280°c (536°f) ceramic lamp holder with 250°c (480°f) teflon cables.

Accessories:

Cable Joint Kit (Cat. CJK150). Clear Lens (Cat. LENSBLC). Retro™ transformer 110/240-12 volt (Cat. /R).

G9 Option (Cat. G9).

Note: The Hunza Super Spike is not compatible with the 38mm pole.

Swivels: Aluminium and Solid Bronze luminaires - 360° rotation and 0 - 90° elevation, solid brass with anti rust spring.

Stainless Steel luminaires - 360° rotation and 0 - 90° elevation, full stainless steel construction.

Standards

IP56/IP66



UL1838

Luminaire Weight

12 volt:

Alum: 1.100kg (2lb 6oz) BRZ: 2.700kg (5lb 15oz) SS: 2.400kg (5lb 4oz) Retro™:

Alum: 2.400kg (5lb 4oz) BRZ: 4.200kg (9lb 4oz) SS: 3.700kg (8lb 2oz)

Power Supply

HUNZA™ Inground or Wall Mount Transformer: not included.

RETRO™ IP56

HUNZA™ 110/240-12 volt ac potted electronic transformer is built into the pole. Dimmable with a suitable leading edge dimmer. *Note see page 9.3 for details.

USA and Canada:

HUNZA™ Wall Mount Transformer: not included.

Luminaire: supplied with 2 x G4 Bi - Pin 20 watt lamp max. Retro™ 2 x G4 Bi - Pin 20 watt lamp max. G9 - 25 watt lamp max.

LED - Refer to previous page.

USA and Canada: 2 x G4 Bi - Pin 20 watt lamp max.

Retro[™] 2 x G4 Bi - Pin 20 watt lamp max. G9 - 25 watt lamp max.

LED - Refer to previous page.

Twin Border Lite G4 20 watt lamp lens height 600mm (24")

