

# Pagoda Pagoda Lite

Cat. No. PGLPGL Cat. No. PGLPGL/R Cat. No. PGLPGLG9










The Pagoda Pagoda Lite has two G4 lamps, which produce a general lighting effect. This luminaire is not for directional lighting. The lens is manufactured from high quality UV stable polycarbonate with stainless anti-glare mesh.

The Retro™ is a 110/240-12 ac mains option suited to an installation where mounting a transformer is a problem, e.g. a brick wall where there is only the cable protruding out of the wall and it is not an option to recess the transformer or when replacing an existing light fitting. The base size increases in size to accommodate the encapsulated IP66 dimmable transformer.

A G9 version of this luminaire is also available for line voltage lamps.

# Ordering Information

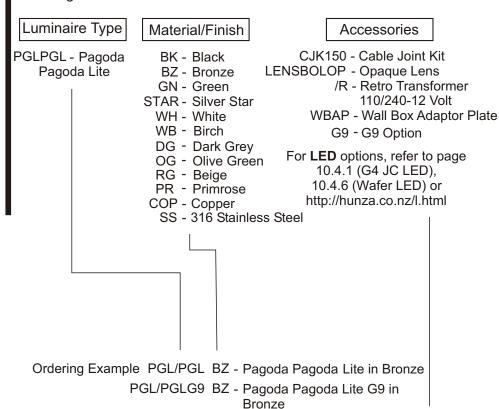



HUNZA FACTORY 130 Felton Mathew Ave Glen Innes Auckland 1072 New Zealand Ph: 64-9-528 9471 Fax: 64-9-528 9361 hunza@hunza.co.nz www.hunza.co.nz INTERNATIONAL CONTACTS: www.hunza.co.nz/contacts.php

WBAP BZ - Wall Box Adaptor Plate in Bronze (Accessories ordered separately)

Specifications may change without notice. Manufactured in New Zealand. © 2011 Hunza Holdings Ltd.

Ver 1.4

## **Luminaire Construction**

CNC machined from one of the following metals:

**Body:** High corrosion resistant low copper 63.5mm (2½") x 10mm (3/8") aluminium.

Base & Mounting Plate: Cast from virgin high corrosion resistant CC401 low copper aluminium alloy chromate substrate and high UV resistant polyester powder coat - Black, Bronze, Green, Silver Star, White, Birch, Dark Green, Olive Green, Beige, Primrose.

**Copper:** Body 63.5mm (2½") x 10mm (3/8").

Base: Hand spun Copper 2mm (1/13").

Mounting Plate: Forged brass (Retro™)

**316 Stainless Steel:** Body 63.5mm (2½") x 9mm (1/3") rod.

Base: Investment cast and CNC

machined.

**Mounting Plate:** Investment cast and CNC machined (Retro™).

# Mounting

12 volt: the luminaire is mounted to the wall using two 316 stainless screws through a shallow base 16mm (5/8") in depth. A Wall Box Adaptor Plate is available as an accessory to fit 3.0 and 4.0 junction boxes for USA/Canada.

Retro™ luminaire (110/240-12 volt): a mounting plate is fixed to the wall using two screws and the luminaire is fitted to the mounting plate.

#### **Features**

#### Lens:

UV stable clear polycarbonate with stainless anti-glare mesh.

#### Gaskets:

Silicone, iron impregnated 220°c (428°f).

# Lamp Holders:

G4 - 350°c (662°f) ceramic multi contact lamp holder with 250°c (480°f) teflon cables.

G9 - 280°c (536°f) ceramic lamp holder with 250°c (480°f) teflon cables.

#### Accessories:

Cable Joint Kit (Cat. CJK150). Not approved for USA /Canada.

Retro™ Transformer 110/240-12 volt (Cat. /R).

Wall Box Adaptor Plate USA/Canada (Cat. WBAP 12 volt luminaire).

Opaque Lens (Cat. LENSBOLOP). G9 Option (Cat. G9).

# Standards

IP66 AS/NZS61046 UL1838

# Luminaire Weight

12 volt

Alum .870kg (1lb 14oz) Cop 1.920kg (4lb 4oz) SS 1.820kg (4lb)

Retro™

Alum 1.200kg (2lb 10oz) Cop 2.200kg (4lb 13oz) SS 2.100kg (4lb 10oz)

# Power Supply 12 volt

HUNZA™ Inground or HUNZA™ Wall Mount Transformer: not included.

#### **USA** and Canada:

HUNZA™ Wall Mount Transformer: not included.

### RETRO™

HUNZA™ 110/240-12 volt ac silicone encapsulated electronic transformer built into the Retro base. Dimmable with a suitable dimmer.

Luminaire: supplied with

2 x G4 Bi-Pin 5,10, 20 watt lamp max. G9 - 25 watt lamp max.

LED - Refer to previous page.

USA and Canada:

2 x G4 Bi-Pin 5, 10, 20 watt lamp max. G9 - 25 watt lamp max.

LED - Refer to previous page.