



ANGLE SE7088 - 18W

IP65 LED architectural adjustable surface mount luminaire

Application

A decorative residential exterior or interior solution

Design Specifications

- Die-cast aluminium body and powder coated body profile
- Clear tempered glass cover
- High efficiency COB LED chips
- High performance multifaceted reflector system
- Integral constant current non-dimmable LED driver
- Adjustable head 0~90°



Technical Specification


Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI	Beam Angle (°)
SE7088 BK	240	18	1500	3000	80	40
SE7088 CB	240	18	1500	3000	80	40

Model No.	Diameter (mm)	Dim (mm)	Body Colour
SE7088 BK	120	120(W) x 316(H)	BLACK
SE7088 CB	120	120(W) x 316(H)	CHARCOAL BLACK

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".



Dimensions

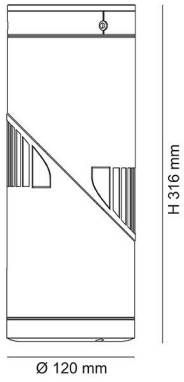



Why is the IP rating important? In brief, IP (Ingress Protection) ratings are defined in EN 60529 and simply defines the ability of an electrical product to seal and protect against the intrusion of foreign objects and water.

(I) As the first numeral stands for intrusion of a foreign object, where (P) as the second numeral stands for the penetration of moisture.

As a guide IP20 rated products would be seen in interior spaces with no requirement for protection against the elements, where an IP65 product would be found in an exterior application which required substantial protection against the elements.

Need more information on IP ratings? Check out the SAL web FAQ's or speak to your local SAL team member.

**For more
information
please
scan me**

