





COOPER III SE7192TC - 18W

Decorative 18 watt round profile IP65 architectural LED wall mount luminaire


Application

A decorative architectural solution for residential & commercial interior or exterior spaces

Design Specifications

- Convenient TC selectable colour temperature, 3000K/4000K/5700K
- Stylish black finish
- Integral non-dimmable control gear, 18 watt
- Robust PC body profile and opal PC diffuser, designed with multi access 20mm rear or side conduit entry points
- High efficiency SMD LED
- Optional eye lid diffuser to order (SE7192E/BK/P) for non-emergency models.

Maintained emergency options are compliant to AS/NZS2293 Emergency Lighting & Exit Signs, guaranteed minimum 90 minutes emergency mode function with LiFePO4 battery technology, spacing classification D20@C0





Technical Specification

| Model No. | Input Voltage (V/AC) | Power (W) | Lumens (lm) | ССТ (К) | CRI | Diameter (mm) |
|----------------|-------------------------|--------------|----------------|----------------|-----|------------------|
| SE7192TC/BK | 240 | 18 | 1600/1800/1750 | 3000/4000/5700 | 80 | 275 |
| SE7192TC/BK/EM | 240 | 18 | 1600/1800/1750 | 3000/4000/5700 | 80 | 275 |

Technical Specification


| Model No. | Dim (mm) | Body Colour |
|----------------|----------|-------------|
| SE7192TC/BK | 60(H) | Black |
| SE7192TC/BK/EM | 60(H) | Black |

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with SAL Terms and Conditions of sale and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".





Dimensions

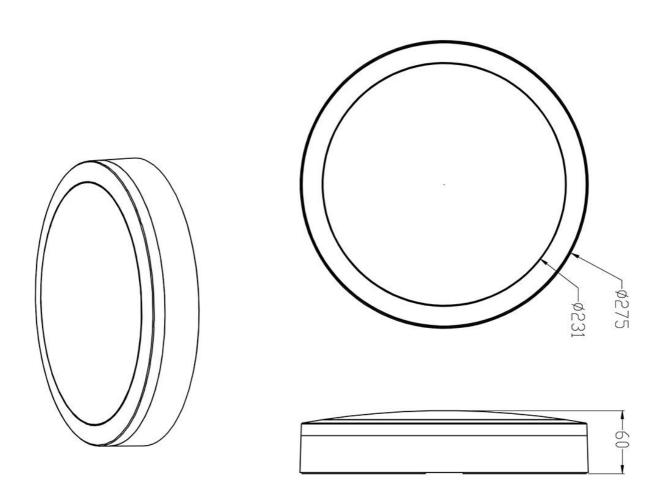





Product Images



