



COOPER SE7083TC EM - 23W


Maintained or Non-Maintained vandal resistant 23 watt, IP65 LED commercial bunker luminaire, IK10 rated with selectable CCT

Application

A decorative architectural solution for commercial exteriors

Design Specifications

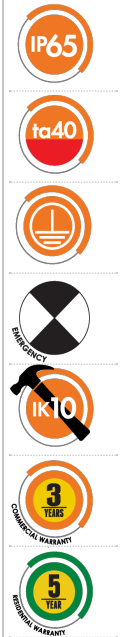

- Robust die-cast aluminium body, UV stabilised opal polycarbonate diffuser
- Durable black or (optional to order) silver powder coated finish
- Stainless steel allen screws
- High efficiency SMD LED optics, selectable CCT
- Integral constant current non-dimmable LED driver
- Compliant to AS/NZS2293 Emergency Lighting & Exit Signs, guaranteed minimum 90 minutes emergency mode function with LiFePO4 battery technology. Emergency spacing classification D25@C0



Performance

Dimmable - **OPTIONAL**

Technical Specification


Product	Model No.	Input Voltage (V/AC)	CCT (K)	Lumens (lm)	Power (W)
	SE7083TC/EM/BK	240	3000/4000/5700	1400/1500/1500	23
	SE7083TC/EM/SL	240	3000/4000/5700	1400/1500/1500	23

Important notes: (1) In the interest of transport and safety, emergency products are supplied with the battery disconnected. (2) In addition to specific emergency commissioning instructions, the battery **MUST** be connected at the time of installation. (3) Continual use in emergency mode greater than 240 hours without recharge, will result in battery failure and void battery warranty.

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

SE7083TC

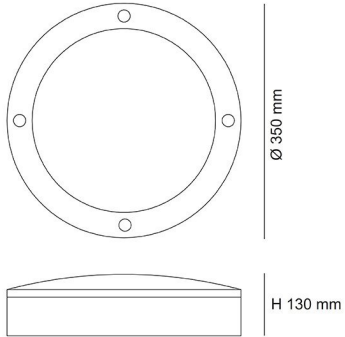


Photometric Data

Photometric Data (at maintained power)

Unit: cd C0/C180 — C90/C270 —

SE7083L/EM/WW at 3000K



At SAL we are always thinking about how we can enhance our customers lighting experience & strongly believe **OUR SUCCESS IS MEASURED BY OUR CUSTOMERS SUCCESS.**



For more
information
please
scan me

