



FLAT SL2110 - 5/30W


Dimmable low profile ceiling luminaires

Application

A creative design for residential or commercial spaces, with a selection of 5, 12, 18 or 30 watt models

Design Specifications

- Seamless surface mounting base
- Robust polycarbonate diffuser, luminaire colour white
- Simple twist lock installation mechanism for the surface mount model.
Pendant includes surface mount cap and three (3) x 1.5M adjustable stainless cables
- Integral constant current trailing edge dimmable LED driver
- CCT 4000K as standard, optional 3000K or 6000K

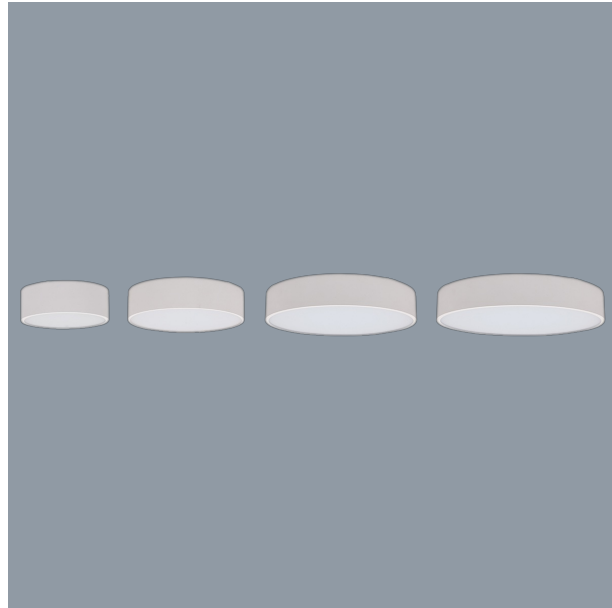

-
-
-
-
-
-
-

Performance

Dimmable - **YES**
Dimmer Type - **Trailing edge**

Technical Specification

Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI	Dimmable
SL2110/10CW	240	5	180	4000	80	YES
SL2110/20CW	240	12	780	4000	80	YES
SL2110/30CW	240	18	1200	4000	80	YES
SL2110/40CW	240	30	2300	4000	80	YES

Technical Specification


Model No.	Dim (mm)	Diameter (mm)	Body Colour
SL2110/10CW	100(W) x 50(H)	260	WHITE
SL2110/20CW	160(W) x 50(H)		WHITE
SL2110/30CW	260(W) x 60(H)		WHITE
SL2110/40CW	350(W) x 60(H)		WHITE

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".


Photometric Data

Unit: cd C0/C180 _____ C90/C270 _____

SL2110/10CW at 4000K

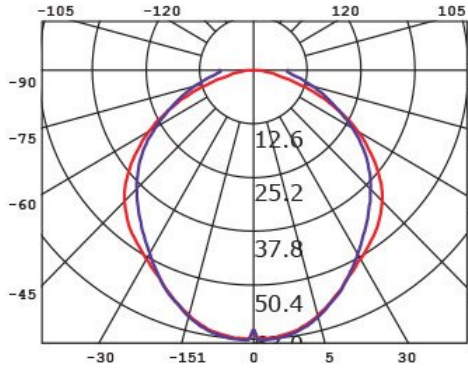

SL2110/50CW at 4000K

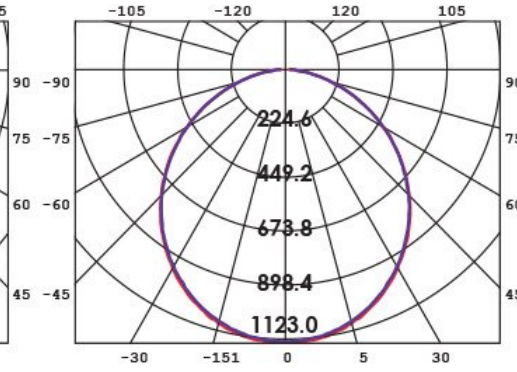

Product Images

