



## FLEXI 12V WHITE COLOUR IP44, FL1209/S - 9W/M

Run length 5 metre, IP44, LED single colour white strip

### Application

Versatile IP44 LED white colour strips, ideal for residential features

### Design Specifications

- High efficiency SMD LED chips, silicon covered
- Max roll 5M, cuttable every 25mm, dimmable with compatible drivers
- Heat sink and 12V constant voltage driver required
- Dimming options: (refer category introduction)
  - Type A - Trailing edge dimming,
  - Type B - LED strip controller LT8915DIM/BT with LT8914DIM/RP if required,
  - Type C - Analogue 1-10V
- LED channel options refer this section



### Performance

Dimmable - **OPTIONAL**

Dimmer Type - **refer dimming options**

### Technical Specification


Model No.	Description	Input Voltage (V/DC)	Watts per metre (W/m)	Beam Angle (°)	CRI	Luminous Flux Per Meter (lm/m)
FL1209WW/S	LED STRIP 12V IP44 3K	12	9	115	80	600
FL1209CW/S	LED STRIP 12V IP44 4K	12	9	115	80	600
FL1209DL/S	LED STRIP 12V IP44 6K	12	9	115	80	600

### Technical Specification

Model No.	LEDs Per Metre	Dim (mm)	Colour Temp. (K)
FL1209WW/S	120	10(W) x 3(H)	3000
FL1209CW/S	120	10(W) x 3(H)	4000
FL1209DL/S	120	10(W) x 3(H)	6000

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

## Dimensions

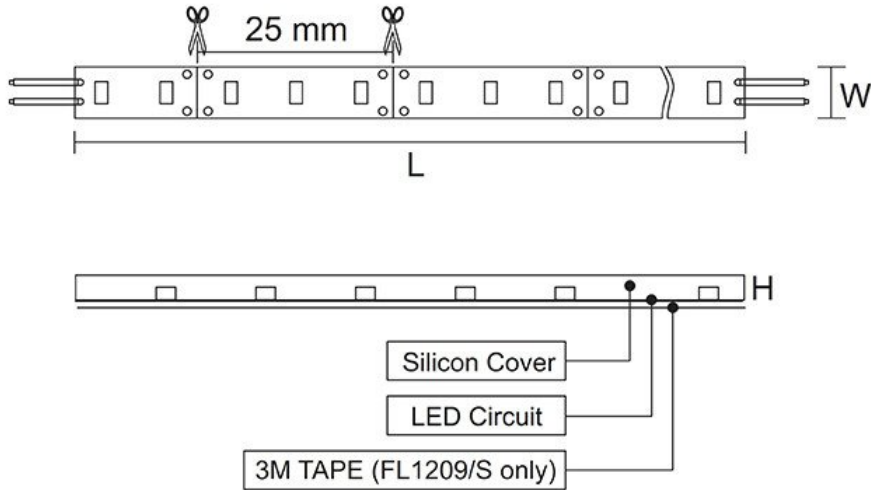

## Product Images

