



FLEXI 24V WHITE COLOUR IP20, FLH2420-20W/M

Run length 5 metre, 24V, HIGH OUTPUT LED Strip, IP20

Application

A creative solution for residential and commercial interior spaces

Design Specifications

- High output greater than 1500lm/m
- High efficiency SMD LED chips with 3M adhesive tape
- Maximum run length 5m, cuttable every 62.5 mm at scissors symbol ✂
- Heat sink and 24V constant voltage LED driver required
- Dimming options: (refer category introduction)
 - Type A - Trailing edge dimming,
 - Type B - LED strip controller LT8915DIM/BT with LT8914DIM/RP if required,
 - Type C - Analogue 1-10V
- LED channel options refer this section



Performance

Dimmable - **OPTIONAL**

Dimmer Type - **refer dimming options**

Technical Specification


Model No.	Description	Input Voltage (V/DC)	Watts per metre (W/m)	Beam Angle (°)	Lumens (lm)	Body Colour
FLH2420 WW	HIGH OUTPUT 24V IP20 3K	24	20	115	1700	CLEAR
FLH2420 CW	HIGH OUTPUT 24V IP20 4K	24	20	115	1800	CLEAR
FLH2420 DL	HIGH OUTPUT 24V IP20 6K	24	20	115	2000	CLEAR

Technical Specification

Model No.	CRI	LEDs Per Metre	Dim (mm)	Colour Temp. (K)
FLH2420 WW	80	96	10(W) x 2(H)	3000
FLH2420 CW	80	96	10(W) x 2(H)	4000
FLH2420 DL	80	96	10(W) x 2(H)	6000

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

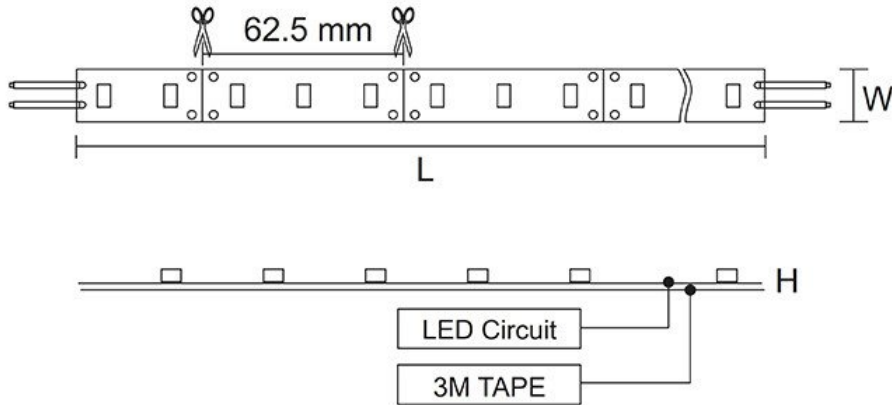

Product Images

