



# FLEXI STREAMLINE 24V SINGLE COLOUR CRI90 FLLB2410/SS - 10W/m




Roll length 15m, maximum run length 15m, 10W/m, 10mm width strip, IP65, COB, CRI90

## Application

Perfect for the home or commercial fit-outs.

## Design Specifications

- Streamline COB LED technology, providing a smooth lighting profile, with 396 x LEDs p/metre
- Single colour white strip, choice of WW, DL or CW
- Beam distribution 140°, CRI90, 10W/m
- Cutable every 45mm
- **Dimming options:** ([quick link](#))
  - Type A - Trailing edge dimming,
  - Type B - LED strip controller LT8915DIM/BT with LT8914DIM/RP if required,
  - Type C - Analogue 1-10V
  - Type D - DALI 2 control
- **LED channel options** ([quick link](#)) Heat sink required for system performance

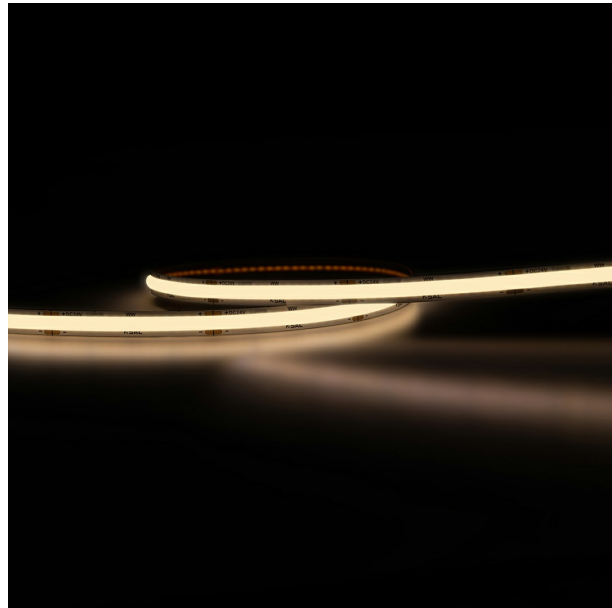

## Performance

- Dimmable - **OPTIONAL**
- Dimmer Type - **Refer dimming options**

## Technical Specification

Product	Model No.	Input Voltage (V/DC)	Watts per metre (W/m)	Beam Angle (°)	CRI	Luminous Flux Per Meter (lm/m)
	FLLB2410/WW/SS	24	10	140	90	735
	FLLB2410/CW/SS	24	10	140	90	800
	FLLB2410/DL/SS	24	10	140	90	840



LEDs Per Metre	Colour Temp. (K)	Dim (mm)
396	3000	10(W) x 2(H)
396	4000	10(W) x 2(H)
396	6500	10(W) x 2(H)

NOTE: for external use, protection against direct UV exposure is recommended.

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

# TO TURN YOUR HOME INTO A **PIXIE SMART HOME**, SELECT A **PIXIE CERTIFIED INSTALLER**.



**SIMPLE!**

For more  
information  
please  
scan me

