



GIBRALTAR SL9722 - 15W


IP66 LED 15 watt vandal proof LED batten with selectable colour temperature

Application

Multi-purpose commercial or industrial utility applications

Design Specifications

- Rounded narrow 92mm profile design, robust UV resistant glass fibre (dark grey) body
- Stainless steel secure fastening screws, IK10 protection
- Operating temperature -20 to +40 degree C
- Integral constant current non-dimmable LED driver, with selectable colour temperature 3000/4000/5700K
- Large terminal block for easy installation
- Opal polycarbonate diffuser





Technical Specification

Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI	Beam Angle (°)
SL9722/15TC	240	15	1500/1650/1650	3000/4000/5700	80	120

Model No.	Body Colour	Dim (mm)
SL9722/15TC	GREY	660(L) x 92(W) x 105(H)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

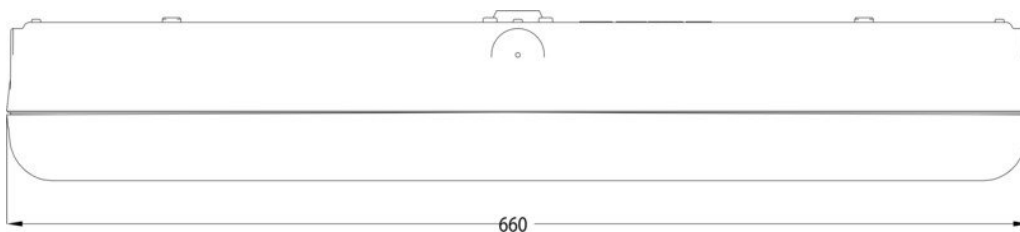

THE NEW ESS106 IS SMALL IN SIZE BUT BIG ON FEATURES.



For more
information
please
scan me

