





KINGSTON SL2115/TCD - 13/24W

Super low profile dimmable LED Oyster, 13 or 24 watt with selectable CCT

Application

A perfect choice for strata environments or the home

Design Specifications

- Selectable CCT 3000K / 4000K / 5700K
- Super low profile PC body form and opal PC diffuser
- High efficiency LED optics, CRI > 80, 100° beam distribution
- Integral, trailing edge dimmable LED driver, choice of 13 or 24 watt
- IP54 design
- Double insulated construction

Performance

- Dimmable **YES**
- Dimmer Type Trailing edge

Technical Specification



Product	Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI
\bigcirc	SL2115/25TCD	240	13	1000/1150/1050	3000/4000/5700	80
\bigcirc	SL2115/30TCD	240	24	1900/2100/2000	3000/4000/5700	80


Dimmable	Beam Angle (°)	Body Colour	Diameter (mm)	Dim (mm)
YES	100	White	244	26(H)
YES	100	White	294	26(H)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with SAL Terms and Conditions of sale and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".





Dimensions

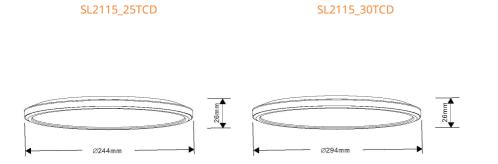



PIXE AMBIENCE, CHANGE YOUR STYLE.

PIXIE AMBIENCE GPO SMART SOCKET SPO23/BTAM



NSW/ACT: 02 9723 3099 QLD: 07 3879 5999 VIC/TAS/SA/NT: 03 9532 3168 WA: 08 9248 7458 For more information please scan me



