



LEDLINE EMERGENCY SLD2000/4000 - 20/40W



MAINTAINED OR NON-MAINTAINED - Linear diffuse batten, compliant to AS/NZS 2293 emergency

Application

Wide body profile, perfect for end to end commercial installations

Design Specifications

- Pressed steel body profile, powder coat white finish
- Selectable CCT 3000/4000/5700K
- Selectable power
- LiFePO4 battery included
- Designed to enable end to end installation and for both maintained and non-maintained systems
- LED charge status display and test switch, Guaranteed 90 minutes emergency function, Emergency classification SLD2000CW/EM D40@C0 & C63@C90, SLD4000CW/EM D40@C0 & C80@C90,



Technical Specification


Product	Model No.	Input Voltage (V/AC)	CCT (K)	CRI	Dim (mm)
	SLD2000TC/MP/EM	240	3000/4000/5700	80	600(L) x 100(W) x 77(H)
	SLD4000TC/MP/EM	240	3000/4000/5700	80	1120(L) x 100(W) x 77(H)

Important notes: (1) Battery warranty twelve (12) months (2) In the interest of transport and safety, emergency products are supplied with the battery disconnected. (3) In addition to specific emergency commissioning instructions, the battery **MUST** be connected at the time of installation. (4) Continual use in emergency mode greater than 240 hours without recharge, will result in battery failure and void battery warranty.

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

SLD2000

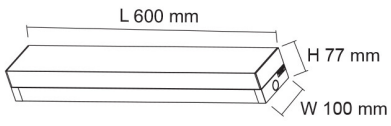

SLD4000

