



## MAXI LOUVERED SE7135 - 7W

Recessed IP65 LED wall luminaire

### Application

A decorative residential exterior or interior solution

### Design Specifications

- Die-cast aluminium body and powder coated face cover
- Opal polycarbonate diffuser
- High efficiency SMD LED chips with integral non-dimmable LED driver
- IP68 PVC cable gland
- ABS installation canister included



WARM WHITE  
3000K

COOL WHITE  
4000K

### Technical Specification


Model No.	Description	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI
SE7135WW/BK	LED BRICKLIGHT LVD. IP65 3K BK	240	7	80	3000	80
SE7135WW/SL	LED BRICKLIGHT LVD. IP65 3K SL	240	7	80	3000	80
SE7135CW/BK	LED BRICKLIGHT LVD. IP65 4K BK	240	7	80	4000	80
SE7135CW/SL	LED BRICKLIGHT LVD. IP65 4K SL	240	7	80	4000	80

### Technical Specification

Model No.	Dim (mm)	Body Colour
SE7135WW/BK	265(L) x 76(W)	BLACK
SE7135WW/SL	265(L) x 76(W)	SILVER
SE7135CW/BK	265(L) x 76(W)	BLACK
SE7135CW/SL	265(L) x 76(W)	SILVER


Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

### Dimensions

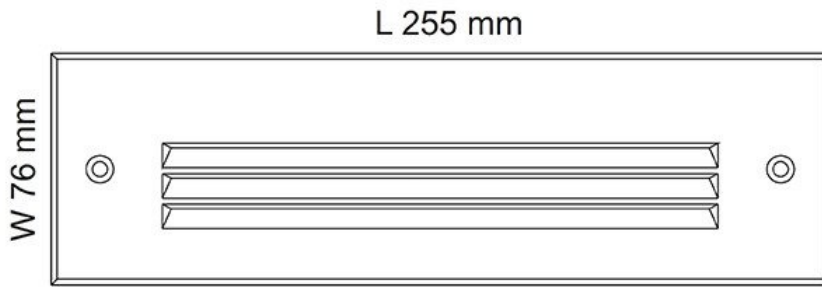

## CANISTER INSTALLATION INSTRUCTIONS

- A1 & A2 are the support plates used during the construction installation process to prevent deformation of the installation canister
- Slot in A1 & A2 plates during construction
- Please remove the support plates (A1 & A2) before final installation



Installation canister: L 235 mm x W 65 mm

