



## NEW BONDI II SL7224TC - 2 x 5W

IP65 LED architectural wall luminaires

### Application

A decorative residential exterior or interior solution

### Design Specifications

- Aluminium body profile, powder coat black or (AST) stainless finish
- Clear tempered glass cover
- Polycarbonate optical lens
- High efficiency LED optics
- Integral non-dimmable LED driver
- Up and Down light distribution 36°

### Performance

- Dimmable - **NO**



### Technical Specification

| Product | Model No.    | Input Voltage (V/AC) | Power (W) | Lumens (lm) | CCT (K)        | CRI |
|---------|--------------|----------------------|-----------|-------------|----------------|-----|
|         | SL7224TC/BK  | 240                  | 10        | 370/410/390 | 3000/4000/6000 | 80  |
|         | SL7224TC/AST | 240                  | 10        | 370/410/390 | 3000/4000/6000 | 80  |

| Beam Angle (°) | Diameter (mm) | Dim (mm)       | Body Colour         |
|----------------|---------------|----------------|---------------------|
| 36             | 60            | 160(H) x 84(D) | BLACK               |
| 36             | 60            | 160(H) x 84(D) | ALUMINIUM STAINLESS |


NOTE: Lumens (lm) displayed are per optical head

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".



## Dimensions

SL7224TC

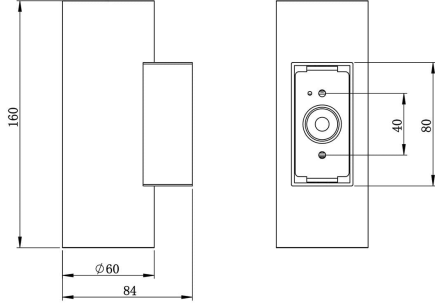



Why is the IP rating important? In brief, IP (Ingress Protection) ratings are defined in EN 60529 and simply defines the ability of an electrical product to seal and protect against the intrusion of foreign objects and water.

(I) As the first numeral stands for intrusion of a foreign object, where (P) as the second numeral stands for the penetration of moisture.

As a guide IP20 rated products would be seen in interior spaces with no requirement for protection against the elements, where an IP65 product would be found in an exterior application which required substantial protection against the elements.

