



PANEL (HO) S9754HOTC - 40W

LED HIGH OUTPUT, UGR <19 panel with TC selectable colour temperature

Application


Commercial office environments where UGR <19 performance is essential

Design Specifications

- Extruded aluminium profile with high efficiency opal diffuser
- Quality powder coated white finish
- High efficiency SMD LED chips UGR<19, CRI >80, beam distribution 100 degree.
- High performance, low flicker remote constant current, non-dimmable LED driver
- Easy selectable colour temperature with an integral DIP switch, 3000K/4000K/5700K
- Suspended wire kits available

Performance

Dimmable - **OPTIONAL**
Dimmer Type - **1-10V, DALI / DSI**

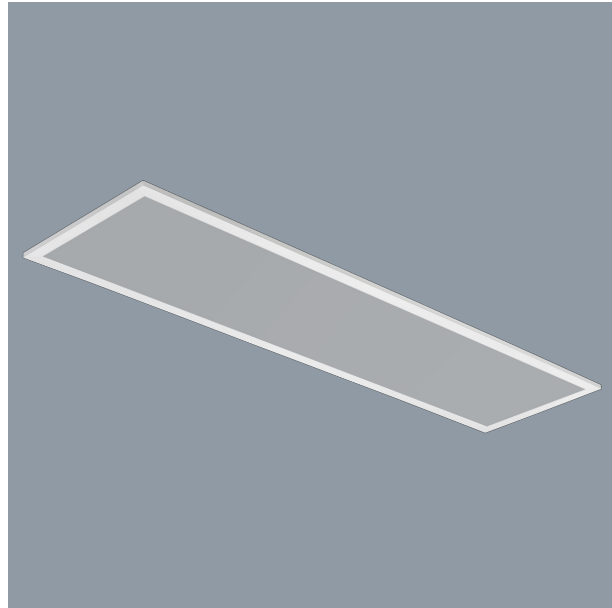

Technical Specification

Model No.	Description	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI
S9754HO/312TC	LED PANEL 40W 295 x 1195 x 12mm 3/4/5.7K	240	40	3600/4000/3800	3000/4000/5700	80
S9754HO/606TC	LED PANEL 40W 595 x 595 x 12mm 3/4/5.7K	240	40	3700/4200/4000	3000/4000/5700	80

Technical Specification

Model No.	Beam Angle (°)	Body Colour	Dim (mm)
S9754HO/312TC	100	WHITE	1195(L) x 295(W) x 12(H)
S9754HO/606TC	100	WHITE	595(L) x 595(W) x 12(H)

Note: LED Panel and driver - DO NOT COVER


Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with SAL Terms and Conditions of sale and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all

IP ratings nominated for Interior products are from "below the ceiling".

Photometric Data

Unit: cd C0/C180 _____ C90/C270 _____

S9754HO/312TC at 4000K

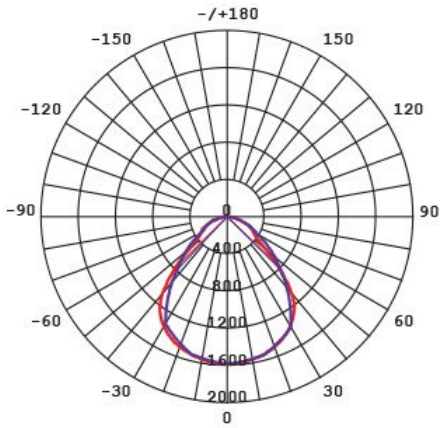

S9754HO/606TC at 4000K

