



PANEL S9784HE - 12/34W


HEERS approved, LED high efficacy panel

Application

Commercial office environments

Design Specifications

- Extruded aluminium profile with high efficiency opal diffuser
- Quality white powder coated finish
- High efficiency SMD LED (>125lm/W), CRI >80, beam distribution 110°
- FlickerCONTROLLED, remote constant current non-dimmable LED driver, complete with flex and plug
- Suspended wire kits available
- Emergency models compliant to AS/NZS2293 with D50 spacing classification available, see Interior Emergency section.

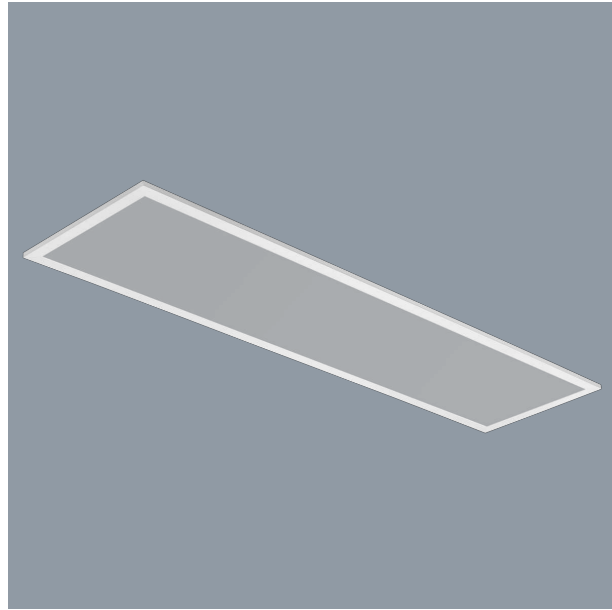

Performance

Dimmable - **OPTIONAL**

Dimmer Type - **Trailing edge, 1-10V, DALI / DSI**

Technical Specification

Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI	Beam Angle (°)
S9784HE306CW	240	12	1500	4000	80	110
S9784HE606CW	240	24	3000	4000	80	110
S9784HE312CW	240	24	3000	4000	80	110
S9784HE612CW	240	34	4250	4000	80	110

Model No.	Body Colour	Dim (mm)	HEERS
S9784HE306CW	WHITE	595(L) x 295(W) x 32(H)	YES
S9784HE606CW	WHITE	595(L) x 595(W) x 32(H)	YES
S9784HE312CW	WHITE	1195(L) x 295(W) x 32(H)	YES
S9784HE612CW	WHITE	1195(L) x 595(W) x 32(H)	YES

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".



LED downlights, oysters, linear battens and profiles,
track lights, strip lights, interior architectural, highbays,
lamps, emergency, floodlights, exterior architectural,
weatherproof, bulkheads, sensors, electrical accessories,
smart lighting controls, drivers

For more
information
please
scan me

