PANEL S9784TC/DP2 - 18/36W

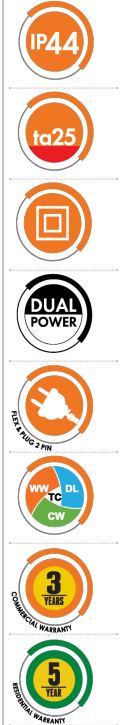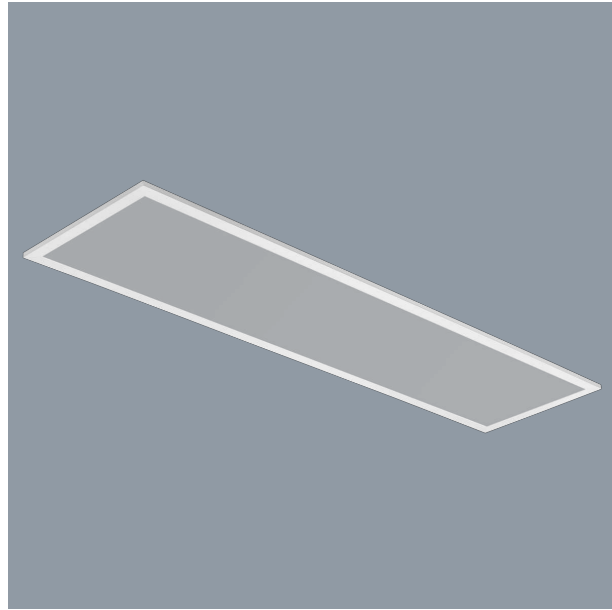LED Backlit panel with selectable CCT and power

Application

Designed for commercial and office space lighting tasks.

Design Specifications

- Extruded aluminium profile with high efficiency opal diffuser, suitable for a range of installation types
- Quality white powder coat finish, high efficiency Backlit SMD LED optics, CRI >80
- Remote constant current non-dimmable LED driver, complete with flex and plug
- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/5700K and selectable power.
- Suspended wire or surface mount kits available

Performance

- Dimmable - **OPTIONAL**
- Dimmer Type - **Trailing edge, 1-10V, DALI / DSI**

Technical Specification

Product	Model No.	Input Voltage (V/AC)	Multiple Wattage	Lumens (lm)	CCT (K)	CRI
	S9784/312TC/DP2	240	18/36	3400/3750/3650	3000/4000/5700	80
	S9784/612TC/DP2	240	35/50	4750/5250/5000	3000/4000/5700	80

Beam Angle (°)	Dimmable	Dimmer Type	Body Colour	Dim (mm)
110	OPTIONAL	Trailing edge, 1-10V, DALI / DSI	WHITE	1195(L) x 295(W) x 32(H)
110	OPTIONAL	Trailing edge, 1-10V, DALI / DSI	WHITE	1195(L) x 595(W) x 32(H)

Note (1) : Lumens (lm) shown are for TOTAL system performance.

Note (2) : For dimmable configurations, the CCT must be specified at the time of order and the DP function is deactivated.

NSW/ACT: 02 9723 3099
QLD: 07 3879 5999
VIC/TAS/SA/NT: 03 9532 3168
WA: 08 9248 7458
www.sal.net.au

- 1 -

PDF Prepared: 24.1.2023 3:52pm
Last page update: Sep 2021
© Copyright SAL - All Rights Reserved

iPART APPROVED · VEET APPROVED · REES APPROVED

LED downlights, oysters, linear battens and profiles, track lights, strip lights, interior architectural, highbays, lamps, emergency, floodlights, exterior architectural, weatherproof, bulkheads, sensors, electrical accessories, smart lighting controls, drivers

For more information please scan me

100% AUSTRALIAN OWNED AND OPERATED