



PANEL S9784U TC/DP - 10/40W


LED High performance panel with selectable colour temperature and power

Application

Designed for commercial and office space lighting tasks.

Design Specifications

- UGR<19 performance
- Extruded aluminium profile with high efficiency opal diffuser, suitable for a range of installation types
- Quality white powder coat finish
- High efficiency SMD LED chips, CRI >80
- FlickerCONTROLLED, remote constant current non-dimmable LED driver, complete with flex and plug
- Easy selectable colour temperature with an inbuilt DIP switch, 3000K/4000K/5000K, Suspended wire kits available, Emergency models compliant to AS/NZS2293 with D50 spacing classification available, see Interior Emergency section.

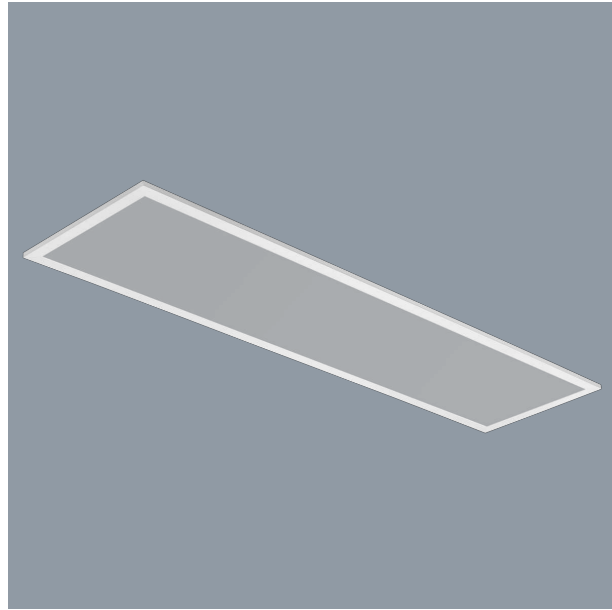

Performance

Dimmable - **OPTIONAL**

Dimmer Type - **Trailing edge (excluding S9784/612), 1-10V, DALI / DSI**

Technical Specification

Model No.	Input Voltage (V/AC)	Multiple Wattage	Lumens (lm)	CCT (K)	CRI	Beam Angle (°)
S9784U606TC/DP	240	16/27	2700/2850/2750	3000/4000/5000	80	80
S9784U312TC/DP	240	16/27	2700/2850/2750	3000/4000/5000	80	80

Model No.	Body Colour	Dim (mm)	iPART	VEET
S9784U606TC/DP	WHITE	595(L) x 595(W) x 32(H)	YES	YES
S9784U312TC/DP	WHITE	1195(L) x 295(W) x 32(H)	YES	YES

Note (1) : Lumens (lm) shown are for FULL POWER performance.


Note (2) : For dimmable configurations, the CCT must be specified at the time of order and the DP function is deactivated.

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with SAL Terms and Conditions of sale and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".


Photometric Data

Unit: cd C0/C180 — C90/C270 —

S9784U312TC at 4000K



S9784U606TC at 5000K





LED downlights, oysters, linear battens and profiles,
track lights, strip lights, interior architectural, highbays,
lamps, emergency, floodlights, exterior architectural,
weatherproof, bulkheads, sensors, electrical accessories,
smart lighting controls, drivers

For more
information
please
scan me

