



PANEL S9784U TC/DP2 - 12W/50W


LED High performance panel with selectable CCT and power

Application

Designed for commercial and office space lighting tasks.

Design Specifications

- UGR<19 performance
 - Extruded aluminium profile with high efficiency opal diffuser, suitable for a range of installation types
 - White powder coat finish
 - High efficiency LED optics, CRI >90
 - FlickerCONTROLLED, remote constant current non-dimmable LED driver, complete with flex and plug
 - Selectable CCT 3000K/4000K/5700K, [Suspended wire kits available](#)
- Emergency models compliant to AS/NZS2293, [see SEL20PK EM Power Kit.](#)

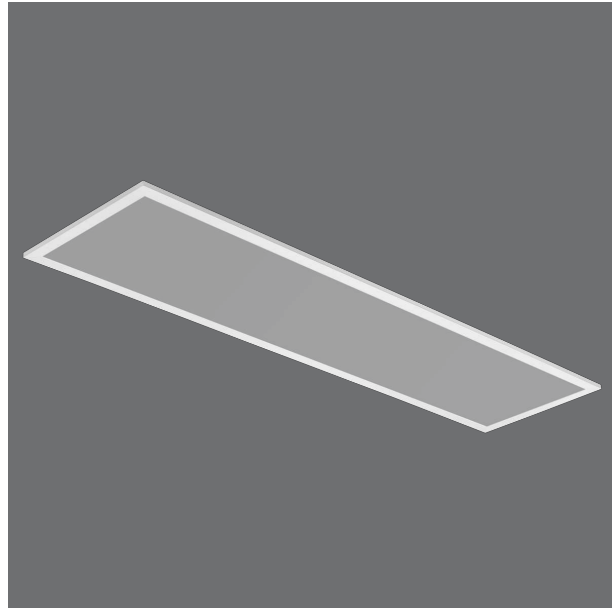

Performance

- Dimmable - **OPTIONAL**
- Dimmer Type - **trailing edge, 1-10V, DALI/DSI**



Technical Specification

Product	Model No.	Input Voltage (V/AC)	Multiple Wattage	Lumens (lm)	CCT (K)	CRI
	S9784U306TC/DP2	240	12/24	2250/2500/2400	3000/4000/5700	90
	S9784U312TC/DP2	240	23/36	3400/3700/3600	3000/4000/5700	90
	S9784U612TC/DP2	240	30/50	4750/5250/5000	3000/4000/5700	90




Beam Angle (°)	Body Colour	Dim (mm)
90	WHITE	595(L) x 295(W) x 32(H)
90	WHITE	1195(L) x 295(W) x 32(H)
90	WHITE	1195(L) x 595(W) x 32(H)

Note (1) : Lumens (lm) shown are for FULL POWER performance.

Note (2) : For dimmable configurations, the CCT must be specified at the time of order and the DP function is deactivated.

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

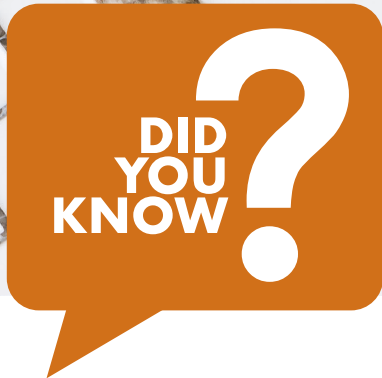

In the interest of safety and product performance, all electrical accessory components are covered by mandatory Australian and International Safety Standards. Always look out for the RCM logo on the product and if in doubt, check the compliance via your local Electrical regulator.

