



PHOENIX SL9775TC - 30W

30 watt LED linkable with 1-10V dimmable functionality and selectable CCT

Application



Decorative commercial service spaces, meeting rooms, amenity areas

Design Specifications

- Extruded rectangular aluminium profile with an opal polycarbonate diffuser
- Choice of white or black finish
- High efficiency LED optics, CRI > 80
- Selectable CCT 3000/4000/5700K
- Integral 1-10V dimmable LED driver
- Surface mount or suspended, suspension kit (2 off 1800mm drops) incl. maximum connected units 15 off, optional straight joiner required

Performance

- Dimmable - **YES**
- Dimmer Type - **1-10V**

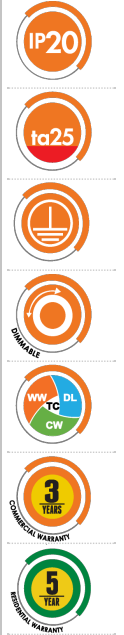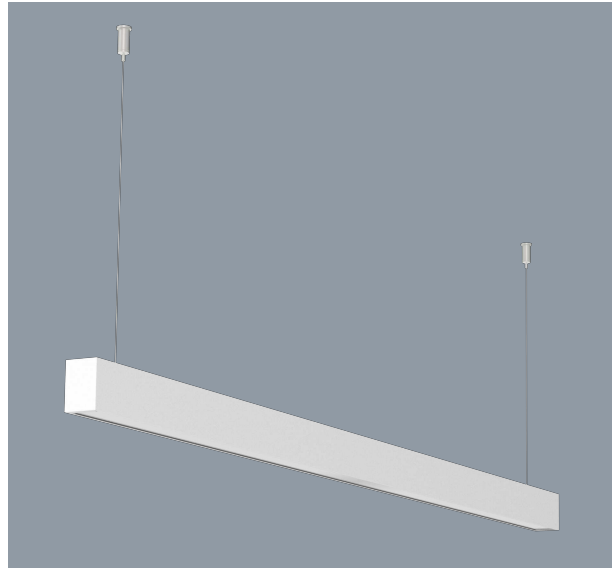

Technical Specification

Product	Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI
	SL9775TC/WH	240	30	3100/3300/3300	3000/4000/5700	80
	SL9775TC/BK	240	30	3100/3300/3300	3000/4000/5700	80

Beam Angle (°)	Dim (mm)	Body Colour
105	1129(L) x 35(W) x 50(H)	WHITE
105	1129(L) x 35(W) x 50(H)	BLACK

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

THE NEW ESS106 IS SMALL IN SIZE BUT BIG ON FEATURES.



For more
information
please
scan me

