



PIP SPL020


Ultra slim 5 watt architectural pendant luminaire

Application

A creative design for residential or commercial spaces

Design Specifications

- Ultra Slimline suspended tube profile, 30mm diameter, two body profile lengths to select (300mm to order or 450mm as standard)
- Flush recessed ceiling plate to suit a standard 72 mm cut out
- Durable aluminium body profile, choice of black or white finish
- High efficiency COB LED chips, 160 lm
- Recessed downlight mounting installation with standard adjustable wire length up to 1.2 m
- Integral constant current non-dimmable LED driver

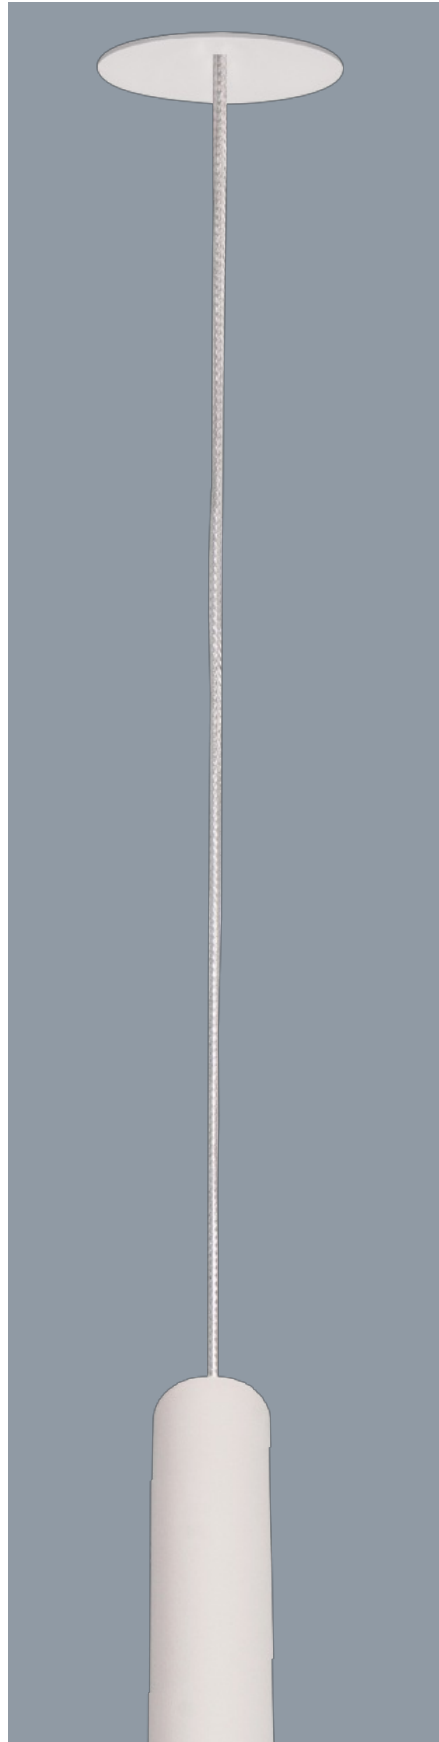



Technical Specification

Model No.	Description	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI
SPL020WW30	LED PENDANT 5W 300mm 3K WHITE	240	5	160	3000	80
SPL020WW45	LED PENDANT 5W 450mm 3K WHITE	240	5	160	3000	80
SPL020WW30BK	LED PENDANT 5W 300mm 3K BLACK	240	5	160	3000	80
SPL020WW45BK	LED PENDANT 5W 450mm 3K BLACK	240	5	160	3000	80


Technical Specification

Model No.	Beam Angle (°)	Dimmable	Dim (mm)	Body Colour
SPL020WW30	25	NO	300(L) x 30(W)	WHITE
SPL020WW45	25	NO	450(L) x variable(H)	WHITE
SPL020WW30BK	25	NO	300(L) x 30(W)	BLACK
SPL020WW45BK	25	NO	450(L) x variable(H)	BLACK

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

Dimensions

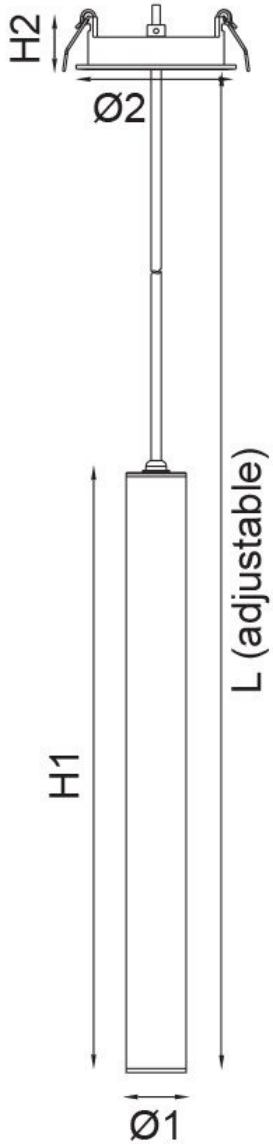



Technical Specifications

Model No.	Input (V)/(Hz)	Power (W)	Lumen (lm)	CCT (K)	CRI	Beam Angle	Fitting Colour	Dimensions (Ø1 x H1, Ø2 x H2 mm)
SPL020WW30	240/50	5	160	3000	> 80	25°	White	30 x 300, 80 x 26
SPL020WW45	240/50	5	160	3000	> 80	25°	White	30 x 450, 80 x 26
SPL020WW30BK	240/50	5	160	3000	> 80	25°	Black	30 x 300, 80 x 26
SPL020WW45BK	240/50	5	160	3000	> 80	25°	Black	30 x 450, 80 x 26