



## PREMIER S9075TC / HP - 14W

12W LED dimmable downlight with selectable CCT, IP64

### Application

Ideal for any residential or commercial interior space

### Design Specifications

- Premium aluminium body, IC-4 rated
- Selectable CCT 3000K / 4000K / 5700K
- Stylish white trim
- Recessed opal polycarbonate diffuser
- High efficiency LED optics
- Trailing edge dimmable driver, double insulated

### Performance

- Dimmable - **YES**
- Dimmer Type - **Trailing edge, optional 1-10V, DALI / DSI**



### Technical Specification

Product	Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	Beam Angle (°)
	S9075TC/WH/HP	240	12	1300/1400/1400	3000/4000/5700	90

Dimmable	CRI	Body Colour	Cut Out (mm)	Diameter (mm)	Dim (mm)	iPART
YES	80	WHITE	195	230	75(H)	YES

REES
YES


Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with SAL Terms and Conditions of sale and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".





## Dimensions



### Dimensions



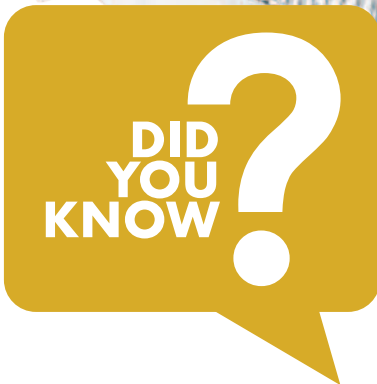

Before selecting a downlight look out for the marks of Compliance and Safety. Starting with the RCM mark, this signals that the product has been tested to all relevant Australian Safety standards, to ensure the product delivers its designed safety performance. In addition and when thermal insulation batts are installed in the ceiling cavity, look out of the IC rating to ensure the product is suitable for such an application.

