



## S-FIRE R MKII SEL10SF4D63 - 1.6W


NON-MAINTAINED - LED 1.6 watt emergency luminaire with Corridor Lens and Adaptor Ring accessories

### Application

A perfect choice for apartments or commercial spaces

### Design Specifications

- Compliant to AS/NZS2293, with an impressive D63 emergency lighting classification, non-maintained. Corridor lens accessory included: D63@C0, D6.3@C90
- Polycarbonate body profile, double insulation, standard trim Ø95mm utilising a Ø70mm cut-out and the kit includes a Ø145mm adaptor ring (Ø130mm cut-out) for retrofit applications.
- 1.6 watt system, LED charge status display and test switch, with remote flickerCONTROLLED control gear and high performance integral Lithium battery
- 1.2 m flex & 3 pin plug fitted, IC-4 rated (luminaire head only), trim colour white
- Guaranteed 90 minutes emergency function.

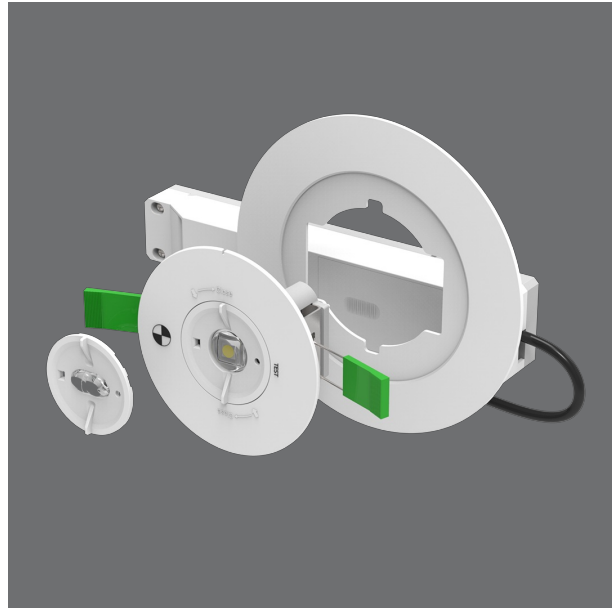


### Performance

- Dimmable - **NO**



### Technical Specification

Product	Model No.	Input Voltage (V/AC)	Power (W)	Dimmable	Body Colour	Diameter (mm)
	SEL10SF4D63	240	1.6	NO	WHITE	95

Dim (mm)	Mass (kg)
95(W) x 31(H)	0.4

**Important notes:** (1) Battery warranty twelve (12) months (2) In the interest of transport and safety, emergency products are supplied with the battery disconnected. (3) In addition to specific emergency commissioning instructions, the battery MUST be

connected at the time of installation. (4) Continual use in emergency mode greater than 240 hours without recharge, will result in battery failure and void battery warranty.

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

## Dimensions

