



COOLUM PLUS S9069/TC - 12W

12 watt dimmable downlight, UGR<19, with flex and plug termination and selectable colour temperature

Application

Perfect for residential or commercial applications


Design Specifications

- 12 watt integral dimmable driver
- A versatile design supplied with flex and plug fitted for easy installation
- High efficiency SMD LED chips, multi-faceted optical system
- CRI > 80, selectable CCT 3000 / 4000 / 5700K, beam distribution 60 degree, UGR<19
- Polyamide trim and body form in white or black
- IC - 4 rated

Performance

Dimmable - **YES**

Dimmer Type - **Trailing edge**

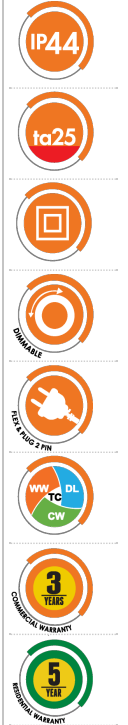

Technical Specification


Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	Beam Angle (°)	Dimmable
S9069TC/WH	240	12	840/920/900	3000/4000/5700	60	YES
S9069TC/BK	240	12	680/740/720	3000/4000/5700	60	YES

Model No.	Body Colour	Cut Out (mm)	Diameter (mm)	Dim (mm)
S9069TC/WH	WHITE	120	140	140(W) x 102(H)
S9069TC/BK	BLACK	120	140	140(W) x 102(H)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

Dimensions






Photometric Data

Photometric Data

Unit: cd C0/C180 — C90/C270 —



THE SFI SYSTEM ELIMINATES LED FLICKERING.

**SIMPLY
MATCH THE
ECO GEM SFI
DOWNLIGHT
WITH THIS
SDD400SFI
DIMMER.**



**DIM with
FLICKER
CONTROL**

For related
products
please
scan me

