


LED CABINET LIGHT

S9105, S9105 SR, S9105 ST ANOVA



DIMENSIONS

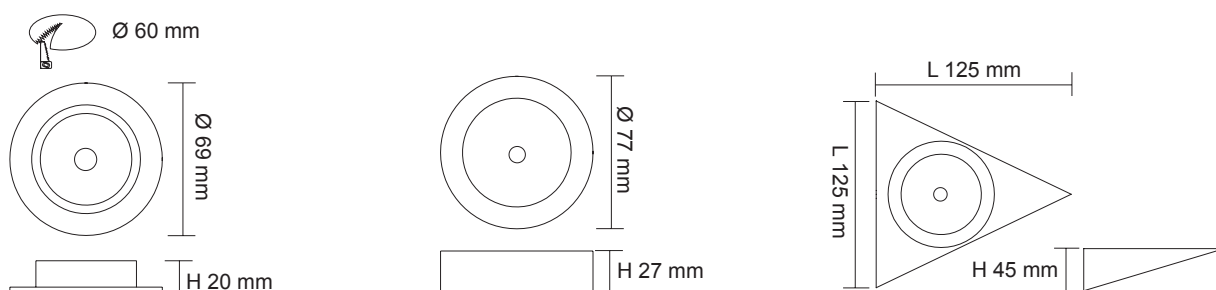

CONSTRUCTION

- Die cast aluminium body
- Powder coated or plated finish
- High efficiency SMD LED chips
- 12V DC LED driver required

IP RATING

- IP20 suitable for interior use only

SUITABLE DRIVERS

- PLUTO EGL12V/6W
- PLUTO EGL12V/15W
- PLUTO 30/12V
- PLUTO 50/12V
- PLUTO 100/12V
- PLUTO 200/12V

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Installation Type	Fitting Colour
S9105WW/WH	12V DC	4W	280lm	3000K	90°	>82	No	Recessed	White
S9105DL/WH	12V DC	4W	280lm	6000K	90°	>82	No	Recessed	White
S9105WW/SN	12V DC	4W	280lm	3000K	90°	>82	No	Recessed	Satin Nickel
S9105DL/SN	12V DC	4W	280lm	6000K	90°	>82	No	Recessed	Satin Nickel

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Installation Type	Fitting Colour
S9105WW SR/WH	12V DC	4W	280lm	3000K	90°	>82	No	Surface Mounted	White
S9105DL SR/WH	12V DC	4W	280lm	6000K	90°	>82	No	Surface Mounted	White
S9105WW SR/SN	12V DC	4W	280lm	3000K	90°	>82	No	Surface Mounted	Satin Nickel
S9105DL SR/SN	12V DC	4W	280lm	6000K	90°	>82	No	Surface Mounted	Satin Nickel

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimmable	Installation Type	Fitting Colour
S9105WW ST/WH	12V DC	4W	280lm	3000K	90°	>82	No	Surface Mounted	White
S9105DL ST/WH	12V DC	4W	280lm	6000K	90°	>82	No	Surface Mounted	White
S9105WW ST/SN	12V DC	4W	280lm	3000K	90°	>82	No	Surface Mounted	Satin Nickel
S9105DL ST/SN	12V DC	4W	280lm	6000K	90°	>82	No	Surface Mounted	Satin Nickel