



SENSOR SMS805CS

Infrared sensor - surface mount

Application

IP20 surface mount sensor designed for residential and commercial spaces

Design Specifications

- Switched power 1600W incandescent, 500W, fluorescent, 200W LED, colour white
- Standby power <1W
- Detection distance Max. 12 m in diameter
- Detection angle 360° , Duration Time / 10sec / 4min adjustable
- Dawn to dusk adjustable, mounting height max. 6m
- Manual override mode:
When the lamp(s) is switched on, turn the lamp(s) off/on twice within 3 seconds, the sensor will go to an 8 hour override mode, during which the lamp(s) will stay on. The sensor will then return to normal detection mode
During override mode, turn the lamp(s) on/off twice within 3 seconds or turn off the lamp(s) for over 10 seconds, the sensor will return to normal detection mode



Performance

In Built Sensor - **YES**


Sensor Type - **PIR**

Technical Specification

Model No.	Description	Input (V)	Power (W)
SMS805CS	PIR SEN. 500W SURFACE WH G1-G2	240	200

Dimensions

SMS805CS

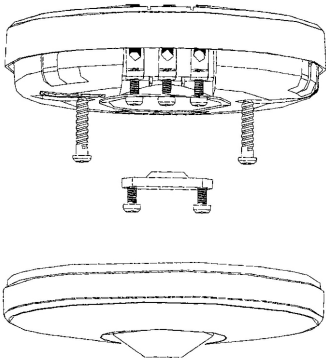

SMS805CS

