


LED LOW PROFILE BATTEN

SL9707, SL9709 TC BLADE




DIMENSIONS

SL9707/60TC



SL9707/120TC



CONSTRUCTION

- Select colour temperature with DIP switch
- Extruded aluminium body with plastic end cap
- Powder coated finish
- Rear cable channel allows easy wiring
- Opal polycarbonate diffuser
- High efficiency SMD LED chips
- Built-in constant current non-dimmable LED driver

IP RATING

- IP20 suitable for interior use only

INSTALLATION TYPE

- Surface mounted
- Suspended (Suspension unit required **SSI1512, SSY1512**)
- End to end installation

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Fitting Colour
SL9707/60TC	240V	20W	1800lm/1900lm/1850lm	3000K/4000K/5000K	110°	>80	White
SL9707/120TC	240V	35W	3300lm/3500lm/3400lm	3000K/4000K/5000K	110°	>80	White

DIP switch



Rear cable channel






SL9709 TC

DIMENSIONS

SL9709/60TC


SL9709/120TC

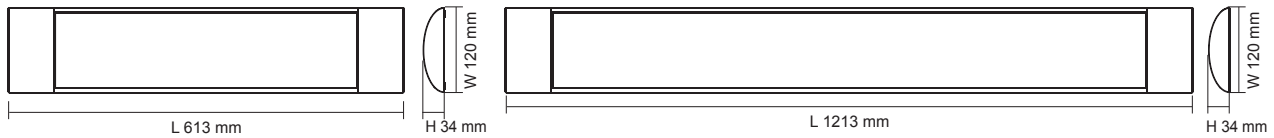

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Fitting Colour
SL9709/60TC	240V	25W	2200lm/2600lm/2400lm	3000K/4000K/5000K	110°	>80	White
SL9709/120TC	240V	48W	4400lm/5000lm/4800lm	3000K/4000K/5000K	110°	>80	White

PHOTOMETRIC DATA (AT CCT 4000K) Unit: cd C0/C180 — C90/C270

SL9707/60TC at 4000K



SL9709/120TC at 4000K

