


LED WEATHERPROOF BATTEN

SL9726 TC SOL



DIMENSIONS

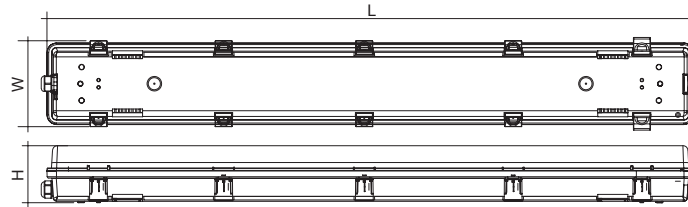

CONSTRUCTION

- Colour temperature selectable by DIP switch
- Rounded shape vandal proof design
- Polycarbonate body & diffuser
- Stainless steel clips & screws
- High efficiency SMD LED chips
- Constant current non-dimmable LED driver fitted

IP RATING

- IP65 weatherproof

DIMMING OPTION

- Trailing edge dimming (SL9726/20TC only)
- 1-10V dimming
- Digital dimming (DSI, DALI)

SENSOR OPTIONS

- Integrated microwave motion sensor
- Integrated microwave motion sensor with standBY function



EMERGENCY OPTIONS

- Compliant to AS2293



ACCESSORIES INCLUDED

- PVC cable glands
- Suspension brackets

INSTALLATION TYPE

- Surface mounted
- Suspended (Suspension kit is required)

SURFACE/SUSPENDED MOUNTING CLIPS TO MAINTAIN IP RATING



Surface mounting bracket



Suspension bracket

Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Dimensions L x W x H
SL9726/20TC	240V	20W	1700lm/1800lm/1800lm	3000K/4000K/6000K	120°	>80	642 x 118 x 77
SL9726/40TC	240V	40W	3400lm/3600lm/3600lm	3000K/4000K/6000K	120°	>80	1251 x 118 x 77