


LED DIFFUSED BATTEN

SL9732 ECOLINE



DIMENSIONS

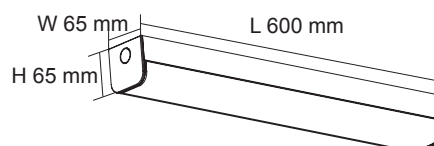

CONSTRUCTION

- 65 mm narrow steel body
- Powder coated finish
- Opal polycarbonate diffuser
- High efficiency SMD LED chips
- Constant current non-dimmable LED driver fitted
- Large terminal block, easy installation
- Colour temperature selectable by DIP switch (TC models)

IP RATING

- IP20 suitable for interior use only

DIMMING OPTIONS

- Trailing edge (SL9732/20 only)
- DALI / DSI, digital

EMERGENCY OPTIONS


- Compliant to AS2293
- LiFePO₄ battery
- Emergency classification:
D40@C0, D25@C90 (SL9732/20EM)
D50@C0, D25@C90 (SL9732/40EM)




Model No.	Input	Power	Lumen	CCT	Beam Angle	CRI	Fitting Colour	Dimensions L x W x H
SL9732/20DL	240V	20W	1900lm	5700K	120°	>80	White	600 x 65 x 65 mm
SL9732/40DL	240V	40W	3800lm	5700K	120°	>80	White	1135 x 65 x 65 mm
SL9732/40CW	240V	40W	3800lm	4000K	120°	>80	White	1135 x 65 x 65 mm
SL9732/20TC	240V	20W	1900lm	3000/4000K/5700K	120°	>80	White	600 x 65 x 65 mm
SL9732/40TC	240V	40W	3800lm	3000/4000K/5700K	120°	>80	White	1135 x 65 x 65 mm

PHOTOMETRIC DATA (AT CCT 4000K) Unit: cd C0/C180 — C90/C270

SL9732/20TC at 4000K



SL9732/40TC at 4000K





DIMENSIONS

