

# THREE CIRCUIT TRACK



## STR4890 UNIVERSAL

- Extruded aluminium profile
- Powder coated finish
- Length 1 m or 2 m
- Completed with one end cap and live end

### IP RATING

- IP20 suitable for interior use only

### DIMENSIONS

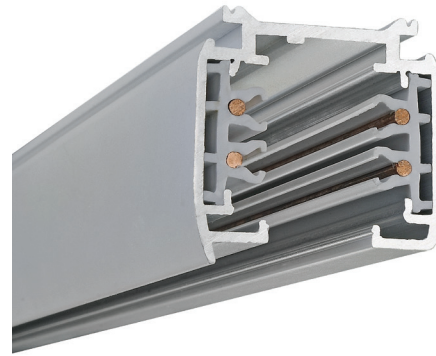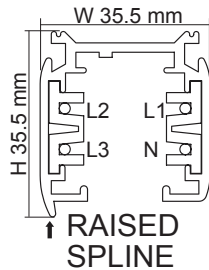

Model No.	Length	Colour
STR4890/1 WH	1 m	White
STR4890/1 BK	1 m	Black
STR4890/2 WH	2 m	White
STR4890/2 BK	2 m	Black


## TRACK COMPONENTS

### MINI JOINER




Model No.	Colour
STR4891 WH	White
STR4891 BK	Black

### LIVE END



Model No.	Colour
STR4892 WH	White
STR4892 BK	Black

### STRAIGHT CONNECTOR




Model No.	Colour
STR4893 WH	White
STR4893 BK	Black

### L-SHAPED CONNECTOR




Model No.	Colour
STR4894 WH	White
STR4894 BK	Black

### T-SHAPED CONNECTOR




Model No.	Colour
STR4895 WH	White
STR4895 BK	Black

### CROSS SHAPED CONNECTOR



Model No.	Colour
STR4896 WH	White
STR4896 BK	Black

### ADJUSTABLE CONNECTOR



Model No.	Colour
STR4897 WH	White
STR4897 BK	Black

### 3 CIRCUITS ADAPTOR



Model No.	Colour
STR4898 WH	White
STR4898 BK	Black


### T-BAR MOUNTING KIT



Model No.	Colour
STR4899/1 WH	White
STR4899/1 BK	Black

### SUSPENSION UNIT WITH ROD

(M6 x 1000 mm threaded rod)

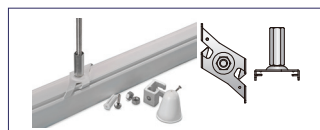

Model No.	Colour
STR4899/2 WH	White
STR4899/2 BK	Black

### SUSPENSION UNIT WITH WIRE

(Ø1.5 mm x 1500 mm wire)



Model No.	Colour
STR4899/3 WH	White
STR4899/3 BK	Black



www.sal.net.au

Specifications above are for reference only and may vary without prior notice