



SURFACE MT EMERGENCY SEL15SM1D80IP65 - 2.2W

NON MAINTAINED - IP65 surface mount emergency

Application


Perfect for any interior commercial emergency lighting application

Design Specifications


- D80 emergency spacing classification
- Polycarbonate white body profile, IP65
- Surface mount installation
- Integral 2.2 watt emergency control gear with long life Lithium battery and flickerCONTROL technology
- Guaranteed 90 minutes emergency function.

Performance

- Dimmable - **NO**

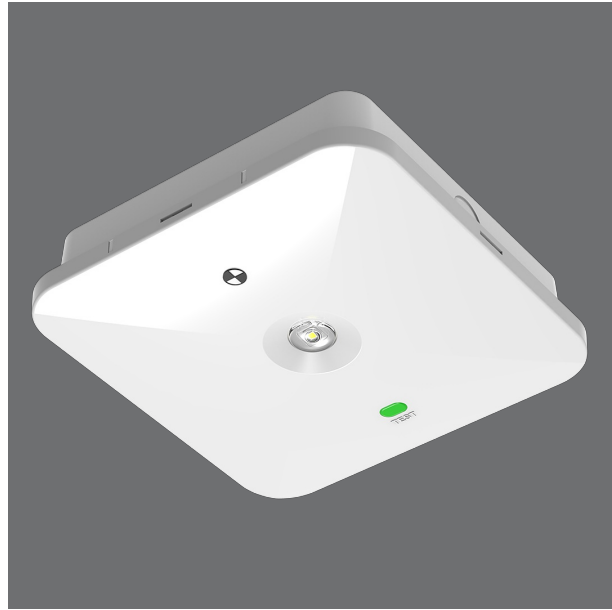

Technical Specification

Product	Model No.	Input Voltage (V/AC)	Power (W)	CCT (K)	Dimmable	Body Colour
	SEL15SM1D80IP65	240	2.2	6500	NO	WHITE
Dim (mm)				Mass (kg)		
185(L) x 185(W) x 45(H)				0.53		

Important notes: (1) Battery warranty twelve (12) months (2) In the interest of transport and safety, emergency products are supplied with the battery disconnected. (3) In addition to specific emergency commissioning instructions, the battery **MUST** be connected at the time of installation. (4) Continual use in emergency mode greater than 240 hours without recharge, will result in battery failure and void battery warranty.

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

