



## UNITREK SPL9017 - 9W


Dimmable 9 watt LED Pendant luminaire

### Application

A creative design for residential or commercial spaces

### Design Specifications

- Architectural cylindrical profile, standard colour black, optional white.
- Durable aluminium body profile
- High efficiency COB LED chips, with polycarbonate optical lens, beam distribution 60 degree, 3000K, CRI.80, 24 and 40 degree options
- Changeable multi-reflector system
- Built-in constant current trailing edge dimmable LED driver
- Standard adjustable wire length up to 1.2 m

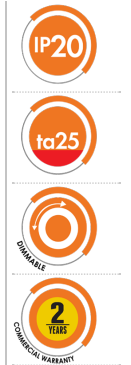

### Performance

Dimmable Driver - **YES**

Dimmer Type - **TRAILING EDGE**

### Technical Specification

Model No.	Description	Input (V)	Lumens (lm)	CCT (K)	Power (W)	CRI
SPL9017WW/BK	LED PENDANT 9W 3K BLACK	240	700	3000	9	80
SPL9017WW/WH	LED PENDANT 9W 3K WHITE	240	700	3000	9	80
SPL9017CW/BK	LED PENDANT 9W 4K BLACK	240	800	4000	9	80
SPL9017CW/WH	LED PENDANT 9W 4K WHITE	240	800	4000	9	80
SPL9017DL/BK	LED PENDANT 9W 6K BLACK	240	800	6000	9	80
SPL9017DL/WH	LED PENDANT 9W 6K WHITE	240	800	6000	9	80


Model No.	Body Colour
SPL9017WW/BK	BLACK
SPL9017WW/WH	WHITE
SPL9017CW/BK	BLACK
SPL9017CW/WH	WHITE
SPL9017DL/BK	BLACK
SPL9017DL/WH	WHITE

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish.

BEAM ANGLE - 25° (standard) - 10°, 40° optical reflector (option)

### Dimensions



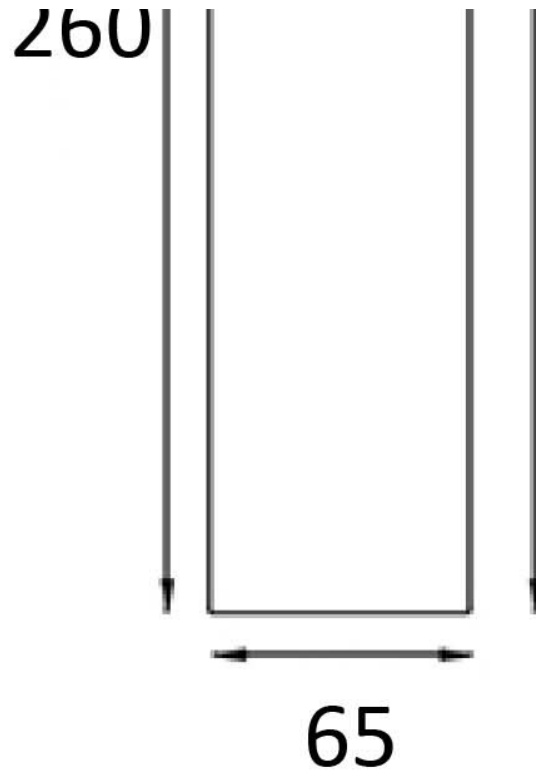

## Product Images

