



Tri-CCT LED BATTEN

Product Features

- Quality white powder coat finish with robust polycarbonate diffuser
- Large PA16 terminal block, easy installation
- Easy selectable colour temperature with an External DIP switch 3000K, 4000K, 5700K
- Easy selectable power with an External Dip switch 20W, 15W and 10W
- High efficiency SMD LED chips, CRI > 80
- 120 degree beam distribution
- Integral constant current non-dimmable and flicker free LED driver

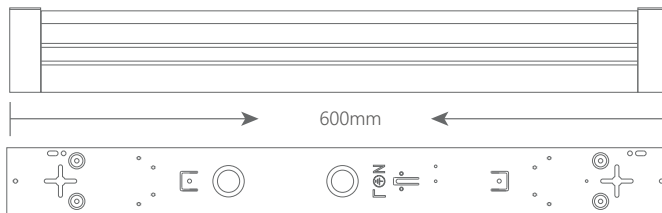

Technical Specification

Model	BT20-TCTP101520
Watts	10W, 15W, 20W selectable
Input Voltage	AC 220~240V 50/60Hz
Dimmable	No, Flicker Free
Power Factor	>0.95
Beam Angle	120°
Colour Temp.	3000K-4000K-5700K
CRI	Ra>80
Lumens Output	2200lm @ 20W 4000K
Size (L*W*H)	600*60*65mm
IP Grade	IP20
Packing	10PCS/CTN
Carton Size	635x150x400mm



* The information in this datasheet may be changed by 3A Lighting at any time without prior notice.