


**NEW**

# UFO LED HIGH BAYS



## Product Features

- Input voltage: 100-240V 50/60Hz
- Wattage: 100W, 150W & 200W
- Power factor: 0.95
- Material: black die-cast aluminium body, PC diffuser
- No reflector required
- Epistar SMD3030 LED chips
- AC cable is 1.5m with plug
- Ambient Temp: -20°C to 50°C
- Suitable for 2-way switching
- Suitable for use with sensors
- Recommend Microwave or PIR sensors
- Not suitable for dimming
- **Can be surface mounted or suspended installation**

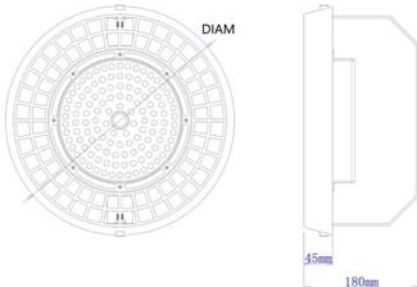

**LIFE**  
50,000hr



**IP65**

**5**  
YEAR  
WARRANTY

CODE	DESCRIPTION	TECHNICAL DATA					DIMENSIONS			
		KELVIN (K)	LUMENS (LM)	WATT (W)	BEAM	CRI	DIAM (MM)	DEPTH (MM)	CARTON QTY	
HIB8	100W UFO LED HIGH BAY	5700	10000	100	90°	70	360	45	1/2	
HIB9	150W UFO LED HIGH BAY	5700	15000	150	90°	70	400	45	1/2	
HIB10	200W UFO LED HIGH BAY	5700	20000	200	90°	70	400	45	1/2	

UPDATED ON 31.10.2017

Tel: (02) 9938 7100 | Fax: (02) 9938 7115 | Email: sales@clalighting.com.au

Website: www.clalighting.com.au



Follow us: facebook.com/CLALighting

**CLA LIGHTING**