

NOVAMULTI SERIES

Interior Tri-CCT LED Recessed Downlights

Product Features:


- Input voltage: 220-240V AC 50/60Hz
- Nominal Current: 140mA
- Colour changeable (3000K, 4000K, 5000K) via switch incorporated within fitting
- Dimmable inbuilt LED driver included
- PBT + Aluminium alloy
- LED chips: SMD 2835 LED
- Flex & plug: 1100mm
- Dimmable with most trailing edge dimmers
- Suitable for 2 way switching
- Ambient Temperature: -20 to 40°C
- Suitable for use with 3 wire motion or microwave sensors
- NOVAMULTI: IPART approved (January 2018)
- Warranty: 3 year replacement (max.8hrs per day)




3 CCT in one fitting
CCT switch on the fitting

Tested & Recommended Dimmers:


Brand	Part No.	PCS per Dimmer
CLA - Trailing Edge	VELA, LYNX	NOVAMULTI: 2-9PCS
Diginet - Ledsmart	MMDM/PB, MMDM/RT	
Clipsal - Universal	32ELEDM, 32E450UDM	NOVAMULTI2: 2-11PCS
HPM - Trailing Edge	CAT400T	



NOVAMULTI



NOVAMULTI2

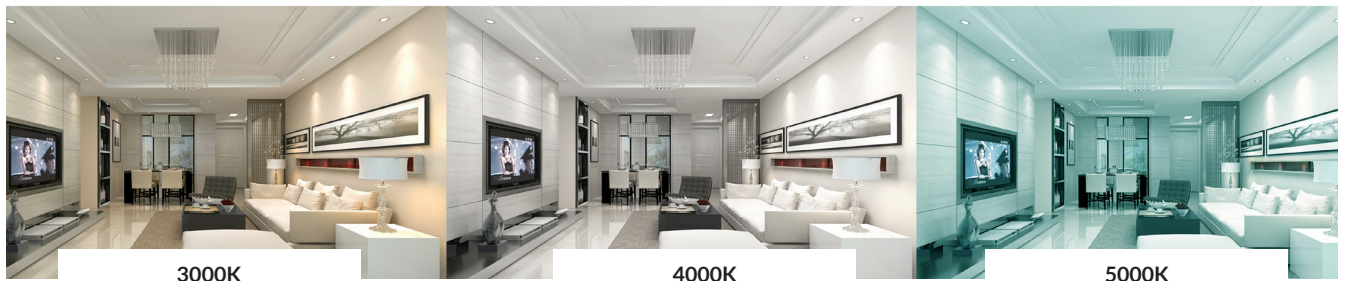

Part No.	Kelvin	Lumens	LED Chips	Watt	CRI	Power Factor	Diam	Depth	Cut Out	Weight	Box	Carton QTY
NOVAMULTI	3000/	700/	36pcs 2835	9W	82	0.9	Ø115mm	60mm	Ø90mm	0.25kg	13x12x8cm	1/40
	4000/	900/										
	5000K	800lm										
NOVAMULTI2	3000/	480/	12pcs 2835	7W	82	0.8	Ø95mm	55mm	Ø70mm	0.2kg	11x11x7cm	1/40
	4000/	600/										
	5000K	480lm										

UPDATED ON 18.12.2018