

PANELTRI

LED Tri-CCT Panel Lights (295x1195mm)

Product Features:

- Input voltage: 220-240V 50/60Hz
- Housing & heatsink: aluminium
- Diffuser: PS
- Tri-CCT: 3000K / 4000K/ 6500K in one fitting
- LED chips: SMD2835
- Power factor: ≥ 0.95
- CRI: ≥ 80
- Ambient temp: -20 to 40°C
- Flex & plug with male joiner included (L: 1200mm)
- **Can be converted to dimmable when used with dimmable driver (SOLD separately)**
- Suitable for 2-way switching
- Suitable for use with PIR & Microwave sensors




Compatible with LED dimmable driver: **CM-40VADDR**



Tri-CCT Switch




Driver dimension: **115x45x27.5mm**



PANELFR2



PANELSPKIT

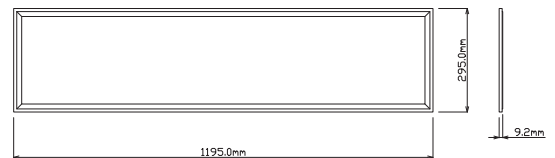

Part No.	Kelvin	Lumens	Watt	CRI	Dimension (mm)	Driver Dimension (mm)	Weight	Box	Carton QTY
PANELTRI02	3000K/ 4000K/ 6500K	2900lm/ 3100lm/ 3000lm	36W	≥ 80	295x1195x9.2	115x45x27.5	2.75kg	127x34x5cm	1/5
CM-40VADDR	DRIVER LED DIMM 36W, Input AC200-240V 50/60Hz Output DC30-42V 850mA 1.2m AC F&P WTY 3YR								
PANELFR2	SURFACE MOUNT FRAME TO SUIT PANELTRI02 PANELM02 (1195mm x 295mm x D50mm) WTY 3YR								
PANELSPKIT	SUSPENSION (External TBAR) KIT 1 Pair TO SUIT PANELM PANELTRI WTY 3YR								