

RAZORM SERIES

Interior Surface Mounted LED Tri-Colour Batten



3000K

4000K

5000K




- *CCT Switch in the fitting
- *Central hole in the back plate

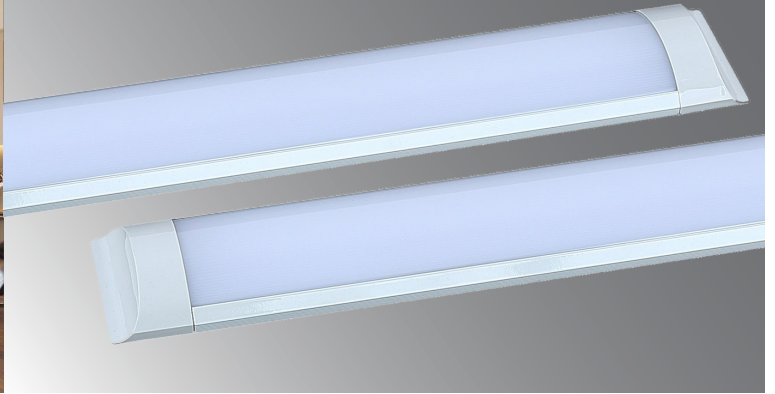


General Lighting

Product Features:

- Input voltage: 220-240V AC 50/60Hz
- Constant current inbuilt driver included
- Inrush current: <20A
- Housing: powder coated aluminium
- Diffuser: PC
- Heat sink: aluminium
- CCT changeable: 3000K/ 4000K/ 5000K
- LED chips: SMD2835
- Power factor: ≥ 0.9
- CRI: >80
- Ambient temp: -20 to 40°C
- Not suitable for dimming
- Suitable for 2-way switching
- Suitable for use with 3 wire motion or Microwave sensors



RAZORM001



RAZORM002

30,000hr
Lifetime

160°
Beam Angle

IP20
Rated

3YEAR
Replacement
Warranty

Part No.	Description	Kelvin (K)	Lumens (LM)	Watt	Weight (kg)	Box (cm)	Carton QTY
RAZORM001	BATTEN LED S/M WH Central Hole 18W 160D 600mm 2FT	3000/ 4000/ 5000	1500/ 1700/ 1500	18w	0.40	61x8x4	1/10
RAZORM002	BATTEN LED S/M WH Central Hole 36W 160D 1200mm 4FT	3000/ 4000/ 5000	3000/ 3400/ 3000	36w	0.80	122x8x4	1/10

BROCHURE UPDATED ON 30.10.2018

