


RAZOR SERIES

240V LED SLIMLINE LOW PROFILE BATTEN FITTINGS

**DIMMABLE
MODELS
NOW
AVAILABLE**

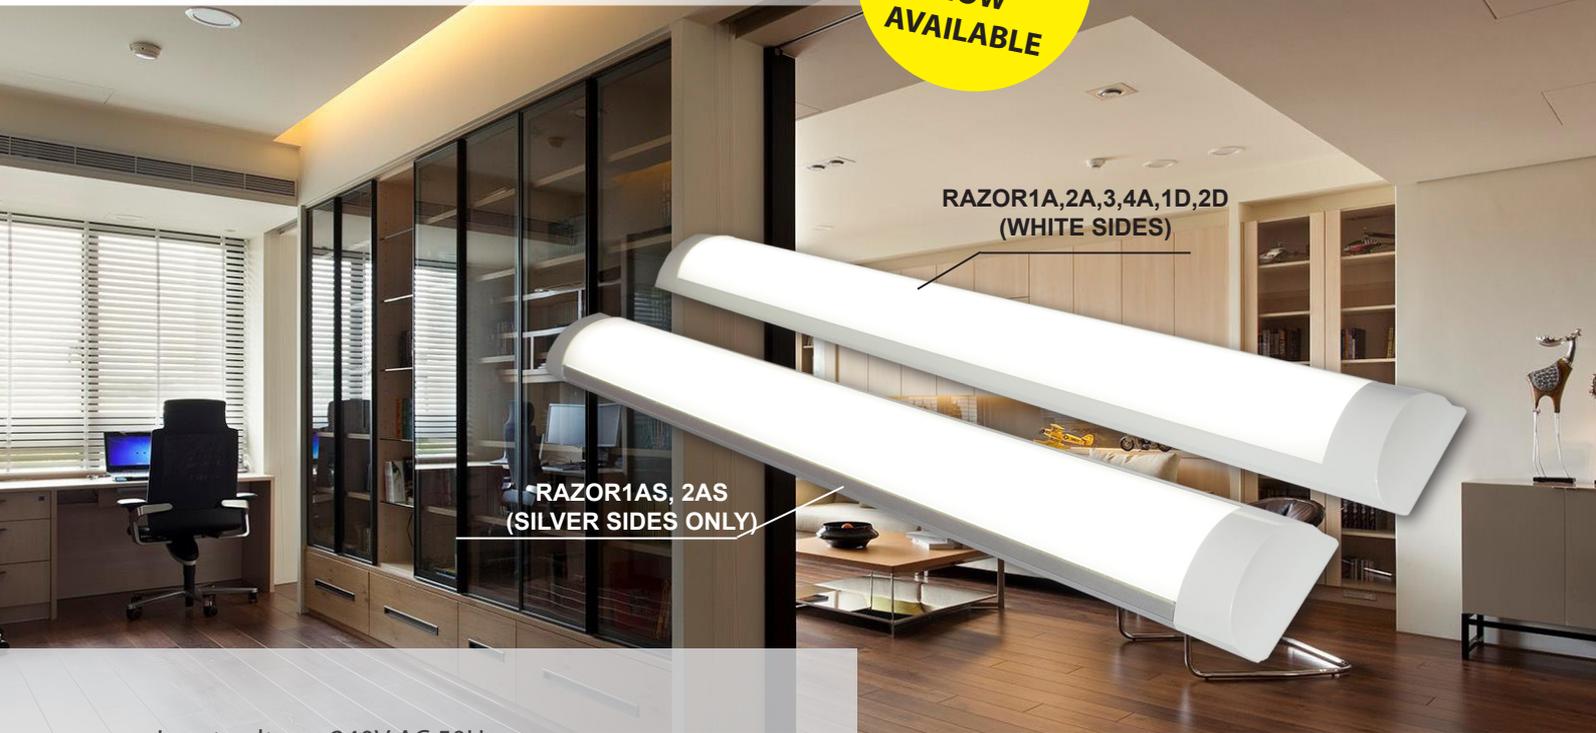

- Input voltage: 240V AC 50Hz
- Wattage: 18W & 36W
- Life time: 30,000hrs
- Power factor: 0.9
- SMD2835 LED chips
- Driver included
- Beam angle: 160°
- Ambient temperature: -20 to 40°C
- Can work with sensors
- IP20 for indoor use
- 3 year replacement warranty

Recommended dimmers (for RAZOR1D,2D):

BRAND	CODE
CLA	LYNX
CLIPSAL	32E450UDM
CLIPSAL	32E450TM
HPM	CAT400T



centralised hole on back plate

CODE	DESCRIPTION	KELVIN	LUMENS	CRI	WATT	LENGTH (mm)	WIDTH (mm)	DEPTH (mm)	BOX WEIGHT (Kg)	BOX (cm)	CARTON QTY
RAZOR1A	18W 600MM WHITE 5000K	5000K	1650LM	82	18	600	75	23	5.6	68x19x18	1/10
RAZOR2A	36W 1200MM WHITE 5000K	5000K	2950LM	82	36	1200	75	23	10	128.5x19x19	1/10
RAZOR3A	18W 600MM WHITE 3000K	3000K	1600LM	82	18	600	75	23	5.6	68.5x19x18	1/10
RAZOR4A	36W 1200MM WHITE 3000K	3000K	2900LM	82	36	1200	75	23	10	128.5x19x18	1/10
RAZOR1AS	18W 600MM SILVER SIDES 5000K	5000K	1650LM	82	18	600	75	23	5.6	68x19x18	1/10
RAZOR2AS	36W 1200MM SILVER SIDES 5000K	5000K	2950LM	82	36	1200	75	23	10	128.5x19x19	1/10
DIMMABLE VERSION (*complete with in built terminal block and cable access.)											
RAZOR1D	18W 600MM WHITE DIMM 5000K	5000K	1650LM	82	18	600	75	31	4.8	62.5x18.5x18	1/10
RAZOR2D	36W 1200MM WHITE DIMM 5000K	5000K	2950LM	82	36	1200	75	31	8.9	122.5x17.5x17.5	1/10
RAZORMBX	EXTERNAL MOUNTING BRACKET FOR RAZOR SERIES										

UPDATED ON 01.10. 2016