

SENS012-013

Adjustable infrared PIR surface mounted sensors IP44

- Adjustable infrared PIR surface mounted sensors
- Available in white and black
- Adjustable head (30° up or down)




Part No.	SENS012, SENS013
Mounting Type	Surface Mounted
Input voltage	220-240V 50/60Hz
Detection Range	180°
Detection Distance	12m Max (<24°C)
Motion Detection Speed	0.6-1.5m/s
Rated Load	1200W HAL/ 600W CFL/ 600W LED
Time Delay	Min.10sec+3sec Max.15min+2min (restarts from last movement)
Ambient Light	<3-2000Lux (adjustable)
Ambient Temp	-20 to 40°C
Working Humidity	<93%RH
Power Consumption	approx. 0.5W
Installation Height	1.8-2.5m
Housing Material	PC



SENS012
(White)




SENS013
(Black)




- UV resistant
- 3 wire
- Day/Night recognition
- Manual override


- (1) To operate as a light only (i.e. override sensor), turn power off for 3 seconds and then back on
- (2) To reverse the override function (i.e. re-introduce the use of the sensor), turn power off for 10 seconds and then back on

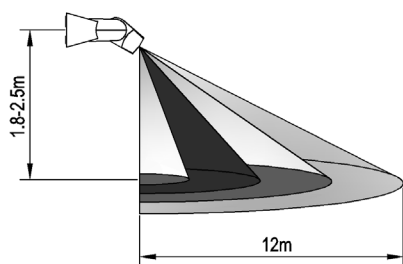

Height of installation: 1.8-2.5m



Detection Distance: Max.12m

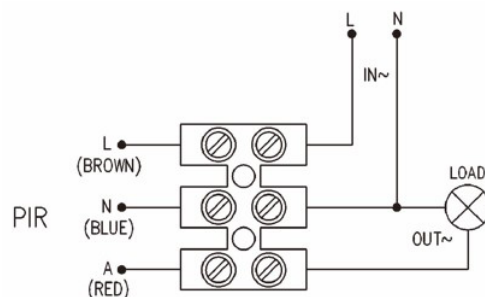

***Must be installed by a licenced electrician
(Installation instructions sheet provided in each product box)**