


# STE32


## Exterior LED **TRI-WATTAGE & TRI-CCT** Round Recessed Step Light **IP44**

- Input voltage: 220-240V 50/60Hz
- Inbuilt Constant Current LED driver
- Diffuser: frosted PC
- Faceplate: PC
- Housing & Heatsink: PP
- Tri-wattage (0.5W / 1.5W / 2.5W) in one fitting
- Tri-CCT (3000K / 4000K / 6500K)
- Wattage switch & CCT switch on rear
- Power factor: 0.4
- CRI: >80
- Ambient temperature: -20 to 40°C
- Not suitable for dimming
- Suitable for 2 way switching
- Suitable for use with PIR or Microwave sensor
- Double insulated




\*Must be installed by a licenced electrician (Installation instructions sheet provided in each product box)


\*Unless protected, not recommended for environments with harsh weather conditions or heavy rainfall. IP65 fittings recommended for such environments. To avoid disappointment and warranty problems, please ensure the IP rating of the chosen product is relevant for the intended use. To maintain the IP rating, mounting screws and cable entries should be sealed with a suitable sealant.

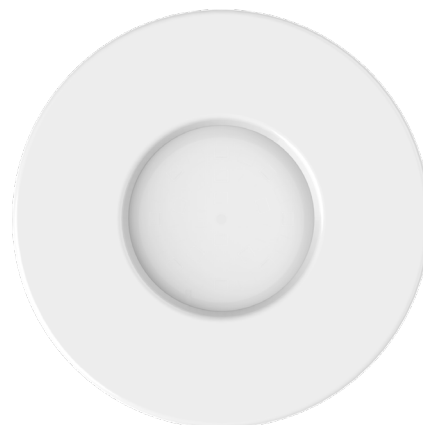

STE32

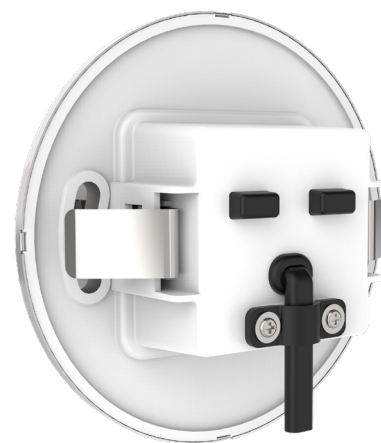

Switch on Rear



Part No	Description	0.5W	1.5W	2.5W	Cut Out	Dimensions	Box Weight	Box Size	Carton Qty
		3000K / 4000K / 6500K	3000K / 4000K / 6500K	3000K / 4000K / 6500K					
STE32	STEP Recessed 240V WH RND TRI CCT Tri Wattage	50LM	150LM	220LM	55-60mm	Ø86x31mm	0.11kg	10x10x-5cm	1/40