


## LED EMERGENCY SPITFIRE


- Input voltage: 220-240V AC 50/60Hz
- Wattage: 3W
- Power factor: >0.5
- Epistar COB LED chips
- Construction material: PC
- Intelligent automatic recharging function
- Constant current mode
- 2 hour emergency operation
- LED charge status
- Test switch with self-test function
- Flex & plug included
- Easy installation

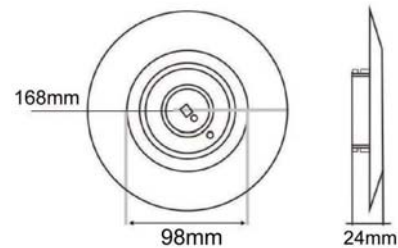

CODE	DESCRIPTION	TECHNICAL DATA				CARTON QTY
		KELVIN (K)	LUMENS (LM)	WATT (W)	CRI	
EMSPF001	LED EMERGENCY RECD SPITFIRE	6000	-	3	80	1/20

## LED DBL/ADJUSTABLE EMERGENCY SPOT

- Input voltage: 220-240V AC 50/60Hz
- Wattage: 3W
- Power factor: >0.5
- Epistar COB LED chips
- Construction material: aluminium
- Ambient temp: 40°C
- Intelligent automatic recharging function
- Constant current mode
- Test switch with self-test function
- Flex & plug included
- Charging time: 16hrs, duration: 90min
- Easy installation



CODE	DESCRIPTION	TECHNICAL DATA				CARTON QTY
		KELVIN (K)	LUMENS (LM)	WATT (W)	CRI	
EMD/ADJSPOT	LED EMERGENCY WALL MOUNT LIGHT (SPARTAN)	6000	-	3	80	1/16

GROUP: EMERCY