



AIRLEE S9605TC - 15/40W

15 - 40 watt IP65 surface mount downlight with dimmable options

Application


Ideal for any retail, residential or commercial interior space

Design Specifications

- Choice of 15, 30 or 40 watt integral control gear, with flickerCONTROLLED performance
- Selectable CCT 3000 / 4000 / 5700K
- Choice of black or white powdercoat finish
- Robust IP65 die-cast aluminium body profile
- High performance multi-faceted reflector profile, beam 60°, CRI>90
- IK06 rated

Performance

- Dimmable - **YES**
- Dimmer Type - **REFER MODEL NUMBER**

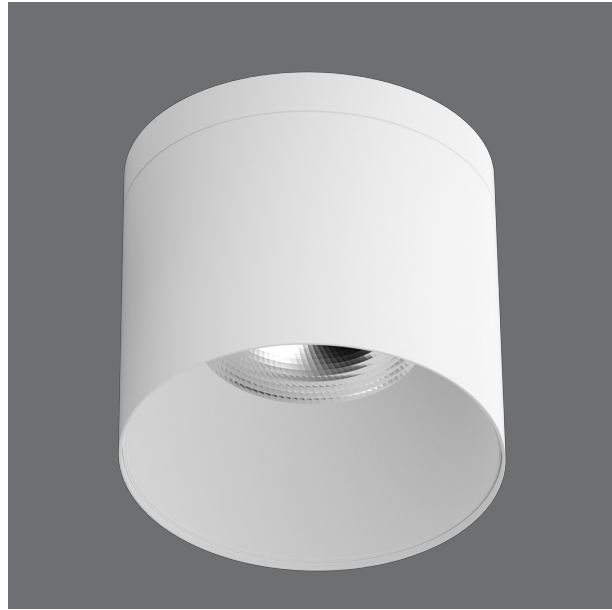



Technical Specification

Product	Model No.	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	Beam Angle (°)
	S9605/85/15TC/WH	240	15	1350/1500/1425	3000/4000/5700	60
	S9605/85/15TC/BK	240	15	1125/1275/1200	3000/4000/5700	60
	S9605/135/30TC/WH	240	30	3000/3300/3150	3000/4000/5700	60
	S9605/135/30TC/BK	240	30	2400/2700/2550	3000/4000/5700	60
	S9605/185/40TC/WH	240	40	4000/4400/4200	3000/4000/5700	60
	S9605/185/40TC/WH	240	40	3200/3600/3400	3000/4000/5700	60

Dimmable	CRI	Body Colour	Diameter (mm)	Dim (mm)
YES	90	WHITE	86	147(H)
YES	90	BLACK	86	147(H)
NO	90	WHITE	136	150(H)
NO	90	BLACK	136	150(H)
NO	90	WHITE	165	184(H)
NO	90	BLACK	165	184(H)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish. Unless specifically stated, all IP ratings nominated for Interior products are from "below the ceiling".

Dimensions

