

# Titanium Aluminium LED Surface Mounted Eyelid Step Lights

- Surface mounted step light with eyelid
- Titanium coloured aluminium
- Frosted tempered glass
- IP Rating: IP65

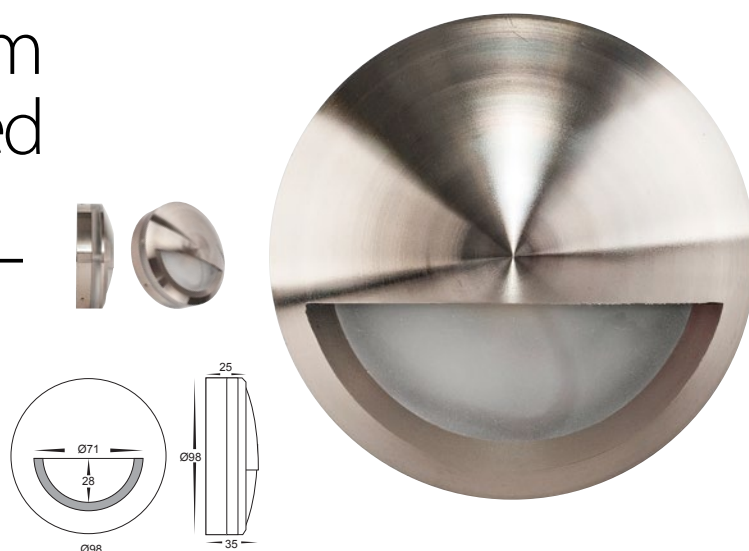






IMAGE	PART NUMBER	COLOUR TEMP	OUTPUT	POWER	INCLUDED GLOBES
	<b>HV2961C-TTM-240V</b>	Cool white, 6000k	400lm	240v LED 5w	Bulit-in 5w LED
	<b>HV2961W-TTM-240V</b>	Warm white, 3000k	360lm	240v LED 5w	Bulit-in 5w LED
	<b>HV2961C-TTM-12V</b>	Cool white, 6000k	400lm	12v DC LED 5w	Bulit-in 5w LED
	<b>HV2961W-TTM-12V</b>	Warm white, 3000k	360lm	12v DC LED 5w	Bulit-in 5w LED

# Matt Black Aluminium LED Surface Mounted Eyelid Step Lights

- Surface mounted step light with eyelid
- Die cast aluminium powder coated black
- Frosted tempered glass
- IP Rating: IP65



IMAGE	PART NUMBER	COLOUR TEMP	OUTPUT	POWER	INCLUDED GLOBES
	<b>HV2961C-BLK-240V</b>	Cool white, 6000k	400lm	240v LED 5w	Bulit-in 5w LED
	<b>HV2961W-BLK-240V</b>	Warm white, 3000k	360lm	240v LED 5w	Bulit-in 5w LED
	<b>HV2961C-BLK-12V</b>	Cool white, 6000k	400lm	12v DC LED 5w	Bulit-in 5w LED
	<b>HV2961W-BLK-12V</b>	Warm white, 3000k	360lm	12v DC LED 5w	Bulit-in 5w LED

All low voltage products that specify LED or are supplied with a 12v DC LED globe must be used with a suitable LED driver, refer to pages (185 - 206)  
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to pages (257 - 258)