

# Square Mini Recessed LED Downlights

- Mini square LED downlight
- Aluminium poly powder coated white
- Supplied with a dedicated LED driver
- Cut out: 38mm
- 45° beam angle
- IP Rating: IP20

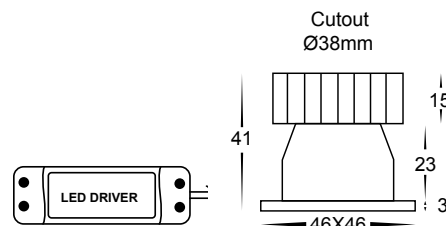


IMAGE	PART NUMBER	COLOUR TEMP	OUTPUT	POWER	INCLUDED GLOBES
	<b>HV5701C</b>	Cool white, 6000k	270lm	240v LED 3w	Built in 3w LED
	<b>HV5701W</b>	Warm white, 3000k	240lm	240v LED 3w	Built in 3w LED

# Round Mini Recessed LED Downlights

- Mini round LED downlight
- Aluminium poly powder coated white
- Supplied with a dedicated LED driver
- Cut out: 38mm
- 45° beam angle
- IP Rating: IP20

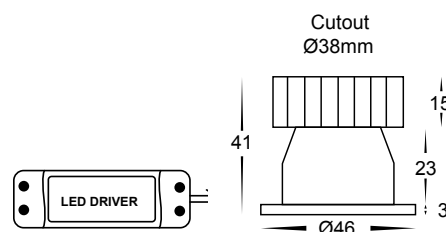


IMAGE	PART NUMBER	COLOUR TEMP	OUTPUT	POWER	INCLUDED GLOBES
	<b>HV5702C</b>	Cool white, 6000k	270lm	240v LED 3w	Built in 3w LED
	<b>HV5702W</b>	Warm white, 3000k	240lm	240v LED 3w	Built in 3w LED

All low voltage products that specify LED or are supplied with a 12v DC LED globe must be used with a suitable LED driver, refer to pages (185 - 206)  
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to pages (257 - 258)