


Titanium Aluminium Bollard Lights




825



HV1601/2-TTM
+
HV1603-TTM


*Shown With
Optional Extension*

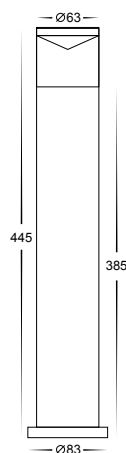- High light bollard
- Titanium coloured aluminium body
- High grade perspex reflector lens
- 2m reinforced cable
- 445mm height
- Raised lamp height to maximise light output
- IP rating: IP54




Suitable for use with LED globes only


IMAGE	PART NUMBER	COLOUR TEMP	OUTPUT	POWER	INCLUDED GLOBES
	HV1601C-TTM	Cool white, 6000k	300lm	240v LED 5w	5w GU10 LED globe
	HV1601W-TTM	Warm white, 3000k	250lm	240v LED 5w	5w GU10 LED globe
	HV1602C-TTM	Cool white, 6000k	300lm	12v DC LED 5w	5w MR16 LED globe
	HV1602W-TTM	Warm white, 3000k	250lm	12v DC LED 5w	5w MR16 LED globe



HV1603-TTM


- High light bollard extension
- Coloured titanium aluminium body
- 380mm total extension height
- Can be used to extend HV1601-TTM or HV1602-TTM
- IP rating: As per fitting used
- Up to 2 extensions can be used





HV1607

- Bollard spike
- High grade stainless steel
- 400mm Length
- Includes stainless steel base plate



All low voltage products that specify LED or are supplied with a 12v DC LED globe must be used with a suitable LED driver, refer to pages (185 - 206)
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to pages (257 - 258)