

316 Stainless Steel In-ground Uplighters Square



- In-ground uplighter square
- Stainless steel 316 marine grade cover
- Flush tempered glass
- Trafficable to 600kg
- Face: 120mm x 120mm
- Installation depth: 155mm
- **NOTE: adequate drainage must be allowed**
- IP rating: IP65

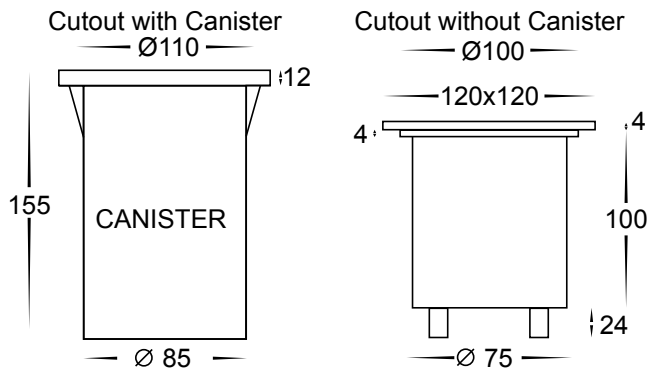


IMAGE	PART NUMBER	COLOUR TEMP	OUTPUT	POWER	INCLUDED GLOBES
	HV1701C	Cool white, 6000k	300lm	12v DC LED 5w	5w MR16 LED globe
	HV1701W	Warm white, 3000k	250lm	12v DC LED 5w	5w MR16 LED globe
	HV1706C	Cool white, 6000k	300lm	240v LED 5w	5w GU10 LED globe
	HV1706W	Warm white, 3000k	250lm	240v LED 5w	5w GU10 LED globe

All low voltage products that specify LED or are supplied with a 12v DC LED globe must be used with a suitable LED driver, refer to pages (185 - 206)
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to pages (257 - 258)