


316 Stainless Steel 10w LED In-ground Uplighters Round


- In-ground uplighter round
- Stainless steel 316 marine grade cover
- Beam angle: 120°
- Flush tempered glass
- Trafficable to 1000kg
- Face diameter: 160mm
- Installation depth: 120mm
- **NOTE: adequate drainage must be allowed**
- IP Rating: IP67



Cutout without Canister

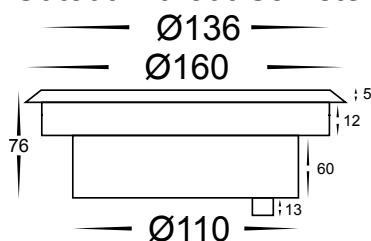

Cutout with Canister

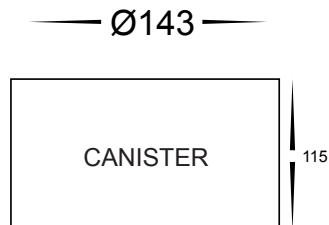

| IMAGE | PART NUMBER | COLOUR TEMP | OUTPUT | POWER | INCLUDED GLOBES |
|-------|--------------------|-------------------|--------|----------------|------------------|
| | HV1832C-12V | Cool white, 6000k | 900lm | 12v DC LED 10w | Built in 10w LED |
| | HV1832W-12V | Warm white, 3000k | 800lm | 12v DC LED 10w | Built in 10w LED |

All low voltage products that specify LED or are supplied with a 12v DC LED globe must be used with a suitable LED driver, refer to pages (185 - 206)
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to pages (257 - 258)