


316 Stainless Steel 12w LED In-ground Uplighters Round



- In-ground uplighter round
- Stainless steel 316 marine grade cover
- Full stainless steel body
- Anti glare honeycomb louvre
- Beam angle: 60°
- Flush tempered glass
- Trafficable to 1000kg
- Face diameter: 210mm
- Installation depth: 110mm
- **NOTE: adequate drainage must be allowed**
- IP Rating: IP67

Cutout with Canister
Ø195



Cutout without Canister
Ø185
Ø210

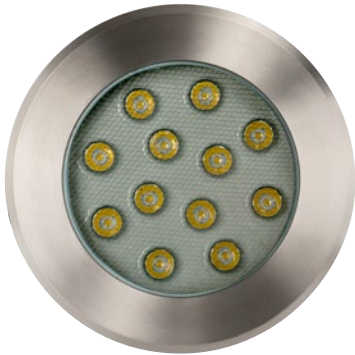
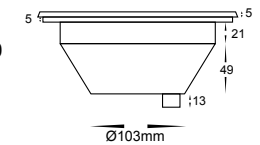


IMAGE	PART NUMBER	COLOUR TEMP	OUTPUT	POWER	INCLUDED GLOBES
	HV1843C	Cool white, 6000k	1200lm	12v DC LED 12w	Built-in 12w LED
	HV1843W	Warm white, 3000k	960lm	12v DC LED 12w	Built-in 12w LED

All low voltage products that specify LED or are supplied with a 12v DC LED globe must be used with a suitable LED driver, refer to pages (185 - 206)
Lumen output measured at source. All globes supplied with fittings are non dimmable. If you require 240v dimmable globes refer to pages (257 - 258)